



AIR BARRIER - CONTINUITY


CHECKLIST
(TICK ALL)

- SEAL BETWEEN WALL AND FLOOR AIR BARRIER WITH A FLEXIBLE SEALANT
- OR
- SEAL GAP BETWEEN SKIRTING BOARD AND FLOOR WITH FLEXIBLE SEALANT

THERMAL PERFORMANCE

CHECKLIST
(TICK ALL)

- ENSURE CAVITY THERM CT/PIR IS SECURED FIRMLY AGAINST INNER LEAF OF CAVITY WALL
- XO/UF FLOOR INSULATION TO TIGHTLY ABUT XT/STR (PERIMETER STRIP)
- ENSURE CAVITY THERM CT/PIR IS INSTALLED AT LEAST 225mm BELOW TOP OF XO/UF
- ENSURE 25MM XT/STR WITH A MINIMUM R VALUE OF 1.13 m² KW (PERIMETER STRIP) TIGHTLY ABUTS BLOCKWORK WALL

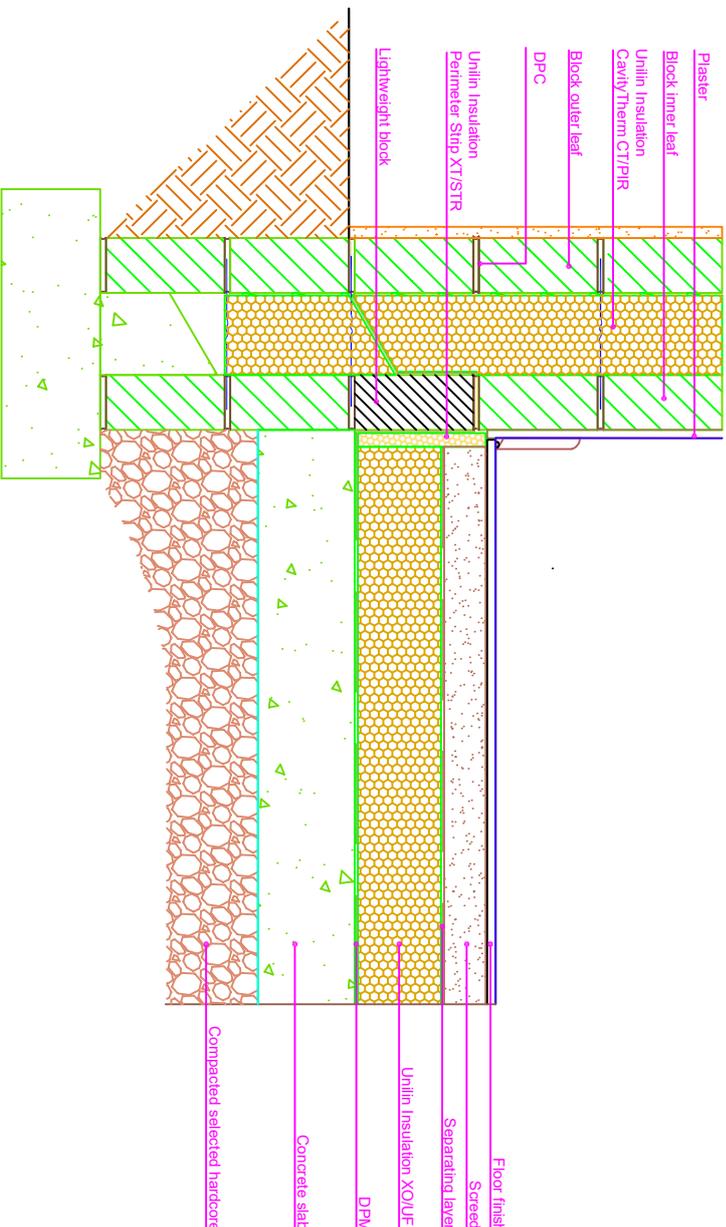

Drawings are for illustration purpose only - not to scale
Details are based on the acceptable construction details
Refer to S. R. 325 for further guidance on detailing

- SEAL ALL PENETRATIONS THROUGH AIR BARRIER USING A FLEXIBLE SEALANT
- SEE ACD 1.01b FOR AIR BARRIER OPTIONS

Copyright ©*2024, Unilin Insulation,
All rights reserved

GENERAL NOTES

Keep cavities clean of mortar spots and other debris during construction

Detail applicable:- Ground-bearing floor, raft foundation, in-situ suspended ground floor slab, pre-cast suspended ground floor. XO/UF above slab with screed floor finish

Where blocks with a maximum Thermal Conductivity of 0.2 W/mK are being used consideration should be give to avoid cracking in plaster due to drying of mortar

The wall floor junction is calculated in accordance with the guidance in BR 497 Second Edition section 2.2.2 and 4.7



NSAI

CERT No: IAB/TM/01

Thermal Modelers Scheme

CavityTherm CT/PIR mm	110	125	150
Psi Value ψ (W/mK)	0.068	0.066	0.065
Temperature Factor (f)	0.89	0.90	0.91
U-Value Wall (W/m ² K)	0.18	0.16	0.13
U-Value Floor (W/m ² K)	0.11 - 0.17		

To be read in conjunction with the Acceptable Construction Details
Any changes to the above construction may change the calculated values

The U values indicated on this certificate are the actual U values for the proposed construction.

The Psi values are calculated using the modelled U value in accordance with the guidelines set out in BR497 and ISO 10211. Contact Unilin Insulation technical support for further guidance

Email: info.ui@unilin.com

Phone No: 046 9066050