

PRODUCT GUIDE

Insulation for:

Walls

Floors

Roofs

Soffit



RENOVATE / INSULATE



When you upgrade your insulation, you can expect to enjoy improved energy efficiency and a more comfortable environment.

By choosing Unilin Insulation as your renovation partner, you are assured of the best product range and the best technical advice.


We push boundaries to improve people's quality of life by creating **Better Spaces. Better Homes.**

FR/ALU



Solutions for:
Walls, Floors & Roofs

For more information on our Renovation range, please visit:
unilininsulation.ie/betterhomes

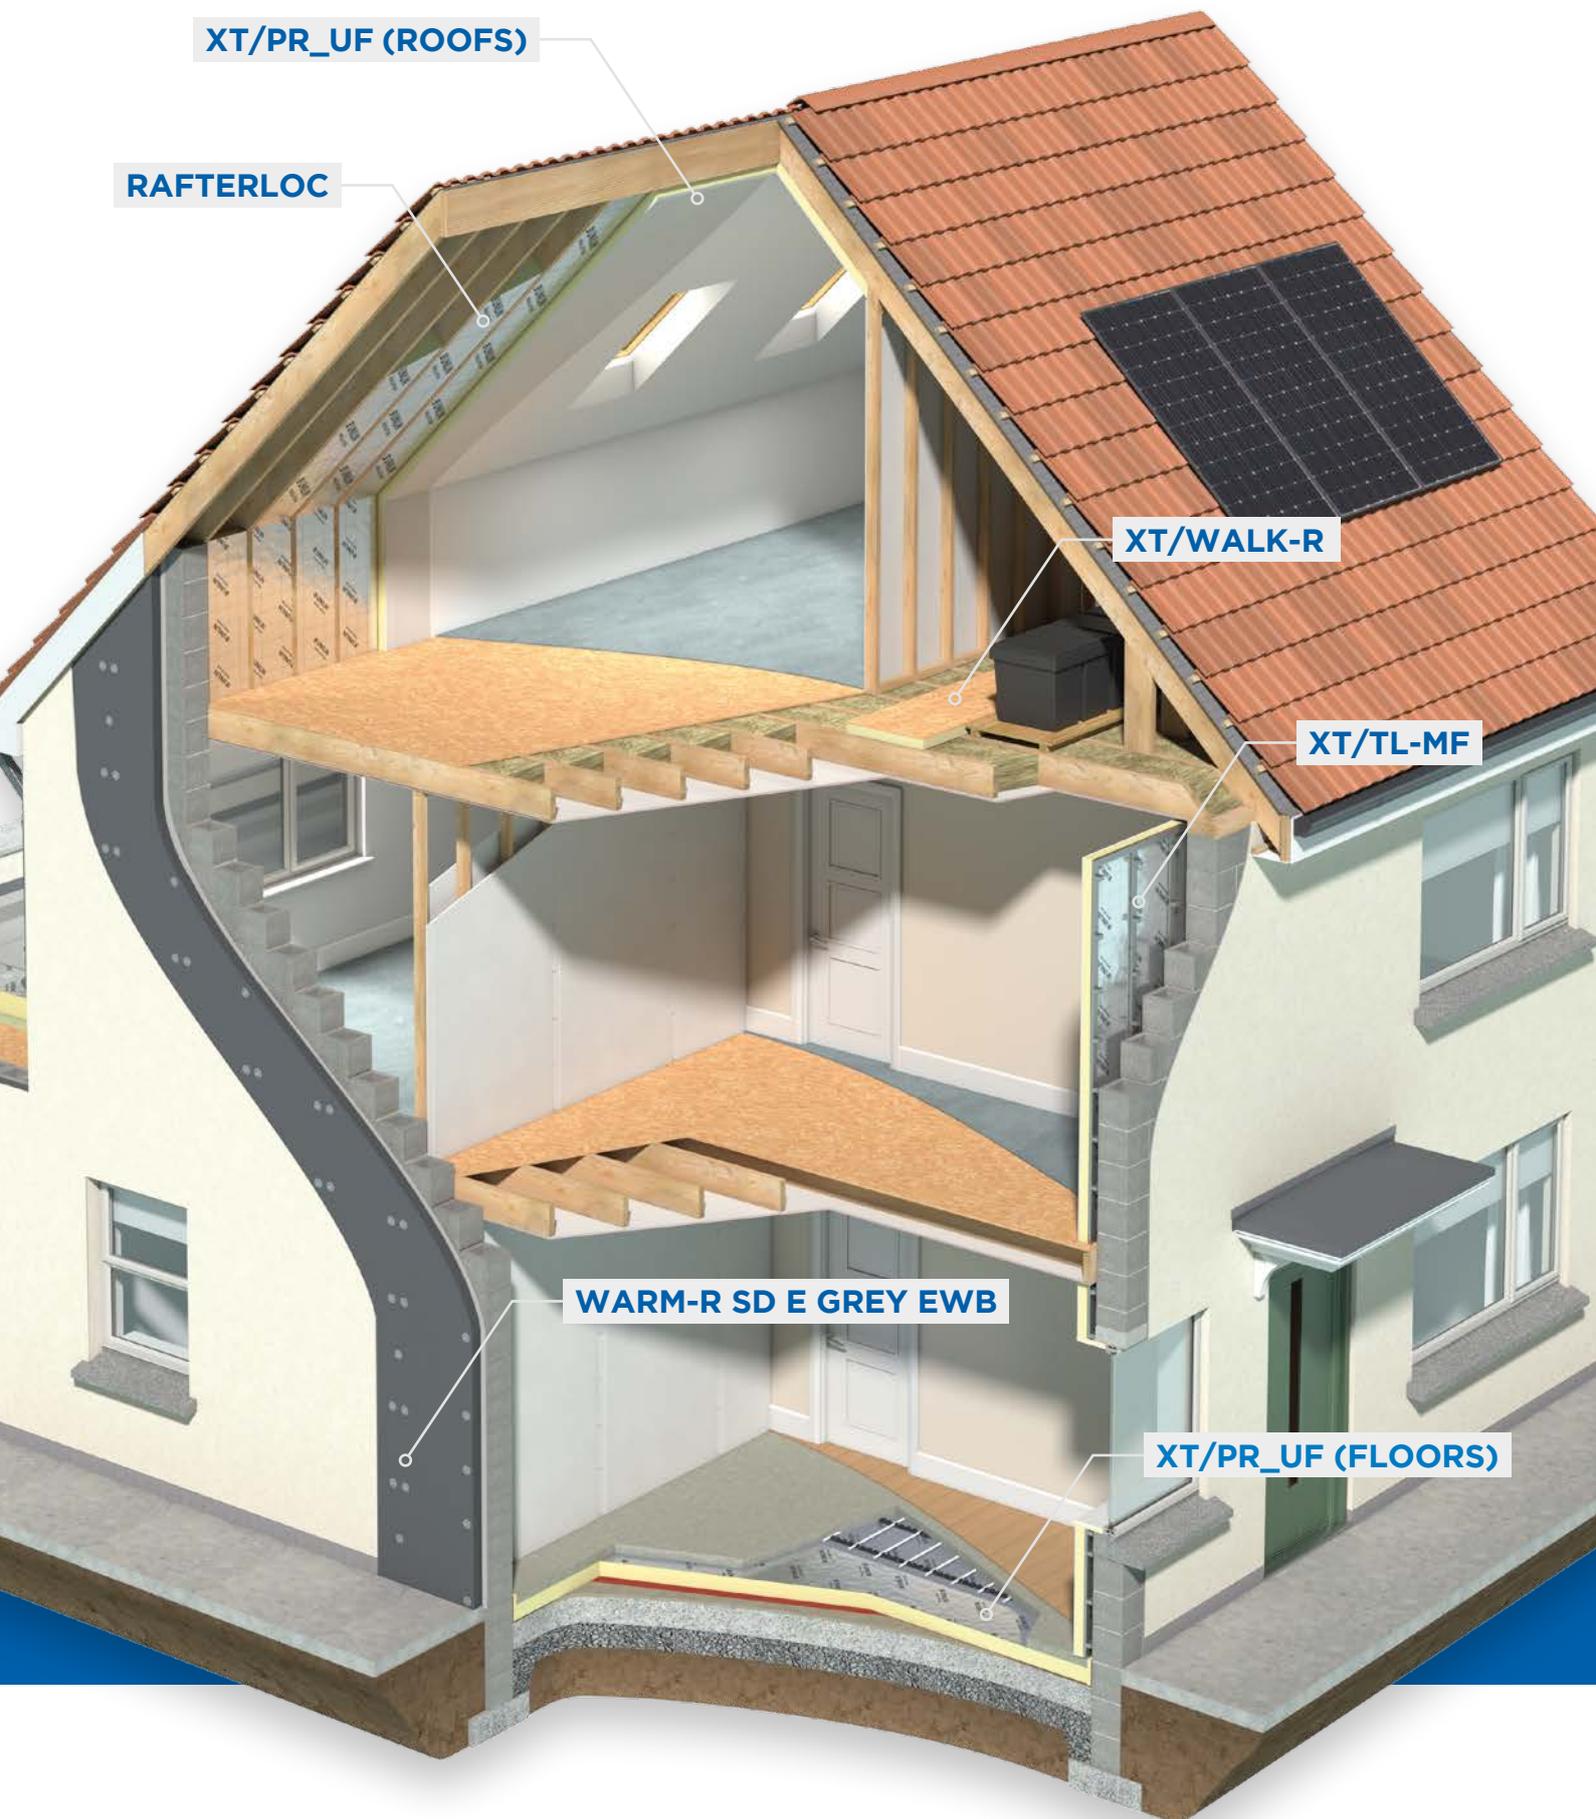

ECO360

BIO-ENHANCED PIR INSULATION

HIGH

**THERMAL
PERFORMANCE**


LOW

**EMBODIED
CARBON**

AVAILABLE FOR WALLS, FLOORS & ROOFS

The ECO360 strategy is a commitment by Unilin Insulation to continually review and improve the sustainable credentials of our product offering and services, to reduce the environmental impact of the projects we work on in terms of operational energy and embodied carbon.

- ✓ Bio-enhanced formulation
- ✓ Part of a design solution to meet 2030 Climate Challenge targets
- ✓ Halogen free formulation
- ✓ Improved thermal performance of 0.020 W/mK
- ✓ Bio-degradable packaging materials
- ✓ Verified EPD available

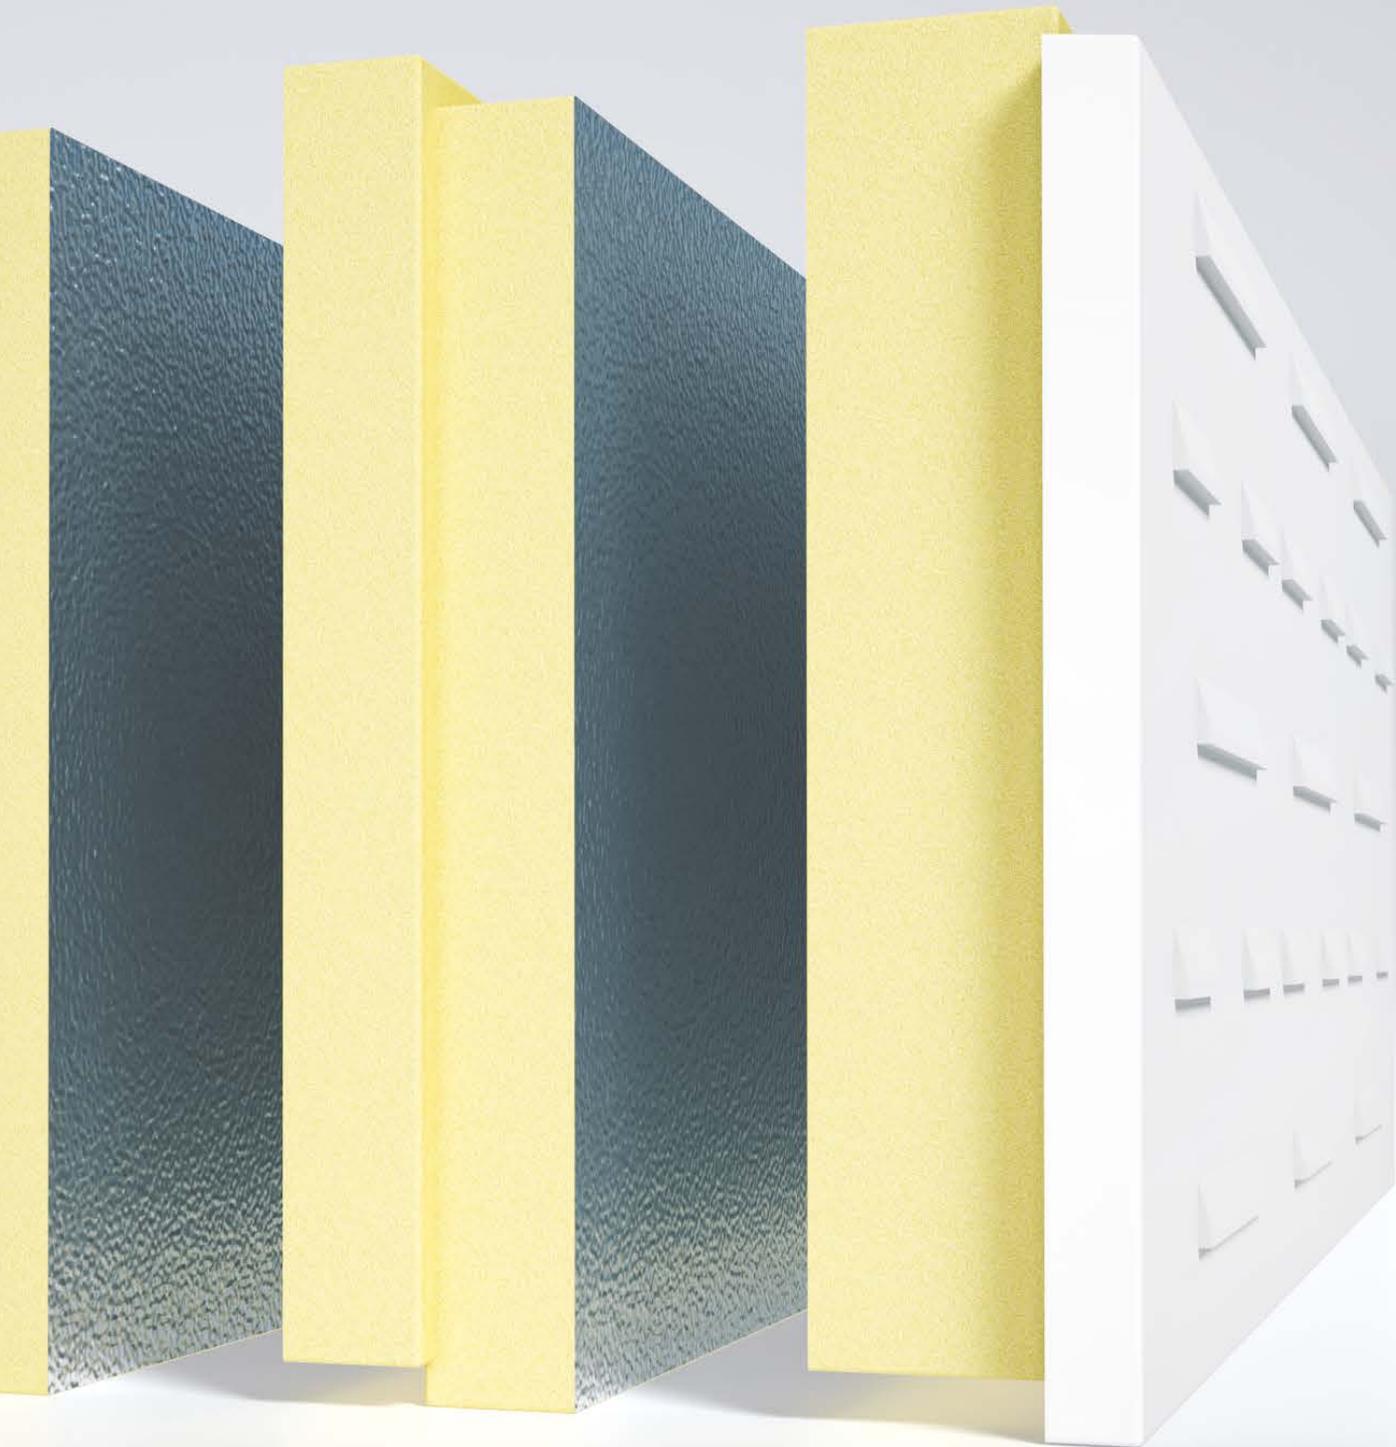

Visit the Unilin Insulation website to download our **Embodied Carbon Report**



Sustainability Pledge

Our environmental impact is the predominant consideration in all operational and commercial decisions for the benefit of our business, staff, shareholders, customers, communities and families.



Unilin Group's
Sustainability strategy



Four Focus Areas



Product

Improving product sustainability, as evidenced by our published Environmental Product Declarations (EPDs). Working with our industry partners, we aim to drive a more environmentally aware industry.



People

Our greatest asset. Unilin's success is driven by a dedicated team. It is their vision that will deliver a more sustainable Unilin operation.



Place

Promoting the adoption of more sustainable practices in the places and communities in which we work and live.



Partnership

Working with our partners throughout the business to make more environmentally sensitive choices.



OUR PRODUCTS



Products by Application

WALLS	
Partial Fill Cavity Walls	
ECO/CW Partial Fill Cavity Walls*	12
XO/XW Partial Fill Cavity Walls*	16
XO/XWP Partial Fill Cavity Walls*	17
XT/CW (T&G) Partial Fill Cavity Walls*	18
Built-in Full Fill Walls	
ECO/CT Full Fill Cavity Walls*	11
CT/PIR Full Fill Cavity Walls*	13
Drylining Walls	
SR/TBFL-MF	19
XT/TL Drylining (Dot & Dab)	20
XT/TL-MF Drylining (Mech Fixed)	21
Rainscreen	
SW/RS Rainscreen	22
Framing Walls	
SR/FB Framing Board	23
XO/FB Framing Board	24
XT/TF Timber Frame	25
External Wall Insulation	
WARM-R SD E GREY EWB	26
SOFFITS	
SR/ST Soffit	50
SR/STP Soffit	51
XO/STP Soffit	52
SW/ST Soffit	53

ROOFS	
Pitched Roofs	
ECO/MA Pitched Roof	28
ECO/MA Sarking Warm Roof Construction	29
XO/PR Pitched Roof	30
XO/SK Sarking (T&G)*	31
XT/PR_UF Pitched Roof	32
XT/RLOC Pitched Roof	33
Flat Roofs	
FR/ALU Flat Roof	35
FR/MG Flat Roof	36
FR/BGM Flat Roof	37
XO/XD Flat Roof	38
Xtrafall	39
FLOORS	
Solid & Suspended Floors	
ECO/MA Solid & Suspended Floors	45
XO/UF Floors	46
XT/PR_UF Floors	47
XT/Walk-R	48

Key

- ECO360
- SAFE-R
- CAVITYTHERM
- STONEWOOL
- XTROLINER
- THIN-R

*Unilin Insulation products are available with engineered jointing for improved continuity and Thermal Bridging detailing.





Products by Range

ECO360

BIO-ENHANCED
PIR INSULATION

ECO/CT 11

Walls:
Full Fill Cavity Walls

ECO/CW 12

Walls:
Partial Fill Cavity Walls

ECO/MA (Roofs) 28

Roofs:
Pitched Roofs

ECO/MA (Roofs) 29

Roofs:
Sarking Warm
Roof Construction

ECO/MA (Floors) 45

Floors:
Solid & Suspended Floors

SAFE-R

PHENOLIC
INSULATION

SR/TBFL-MF 19

Walls:
Drylining Walls

SR/FB 23

Walls:
Steel & Timber Frame

SR/ST 50

Soffit:
Soffit Application

SR/STP 51

Soffit:
Soffit Application

CLOSE-R

INSULATED
CAVITY CLOSER

Safe-R Close-R 58

Insulation Accessories

Close-R 59

Insulation Accessories

CAVITYTHERM

BUILT-IN FULL FILL
PIR WALL INSULATION

CT/PIR 13

Walls:
Full Fill Built-in
Insulation system

XTROLINER

SUPERIOR PERFORMANCE
PIR INSULATION*

XO/XW 16

Walls:
Partial Fill Cavity Walls

XO/XWP 17

Walls:
Partial Fill Cavity Walls

XO/FB 24

Walls:
Steel & Timber Frame

XO/PR 30

Roofs:
Pitched Roofs

XO/SK (T&G) 31

Roofs:
Pitched Roofs

XO/XD 38

Roofs:
Built-up Bituminous Felt
Systems

XO/UF 46

Floors:
Ground Supported
& Suspended Floors

XO/STP 52

Soffit:
Soffit Application

THIN-R

PIR
INSULATION

XT/CW (T&G) 18

Walls:
Partial Fill Cavity Walls

XT/TL 20

Walls:
Drylining Walls
Dot & Dab

XT/TL-MF 21

Walls:
Drylining Walls
Mechanically Fixed

XT/TF 25

Walls:
Timber Framed Walls

XT/PR_UF (Roofs) 32

Roofs:
Pitched Roof

XT/RLOC 33

Roofs:
Pitched Roof

FR/ALU 35

Roofs:
Mechanically Fixed
Single Ply Waterproofing
Systems

FR/MG 36

Roofs:
Single Ply Fully Adhered
/ Partially Bonded Built-
Up Felt Systems

FR/BGM 37

Roofs:
Partially Bonded,
Torch-on, Built-up
Bituminous Felt Systems

XT/PR_UF (Floors) 47

Floors:
Ground Supported
& Suspended Floors

XT/Walk-R 48

Floors:
Loft decking

XTRAFALL

TAPERED
ROOFING SYSTEM

Xtrafall 39

Roofs:
Flat Roofs

FOAMGLAS®

FOAMGLAS® 54

Cellular Glass Insulation

XPS

EXTRUDED POLYSTYRENE
INSULATION

XPS 56

Extruded Polystyrene
Insulation

EPS

EXPANDED POLYSTYRENE
INSULATION

Hytherm/Warm-R 57

Expanded Polystyrene
Insulation

Warm-R SD E 26

Grey EWB
Walls:
External Wall Insulation

STONEWOOL

NON-COMBUSTIBLE
INSULATION

SW/RS 22


Walls:
Ventilation Rainscreen
Cladding

SW/ST 53

Soffit:
Soffit Application

*The reference to superior performance relates to the product or ranges thermal conductivity or fire performance or a combination of both, when compared to our Thin-R range.

WALLS

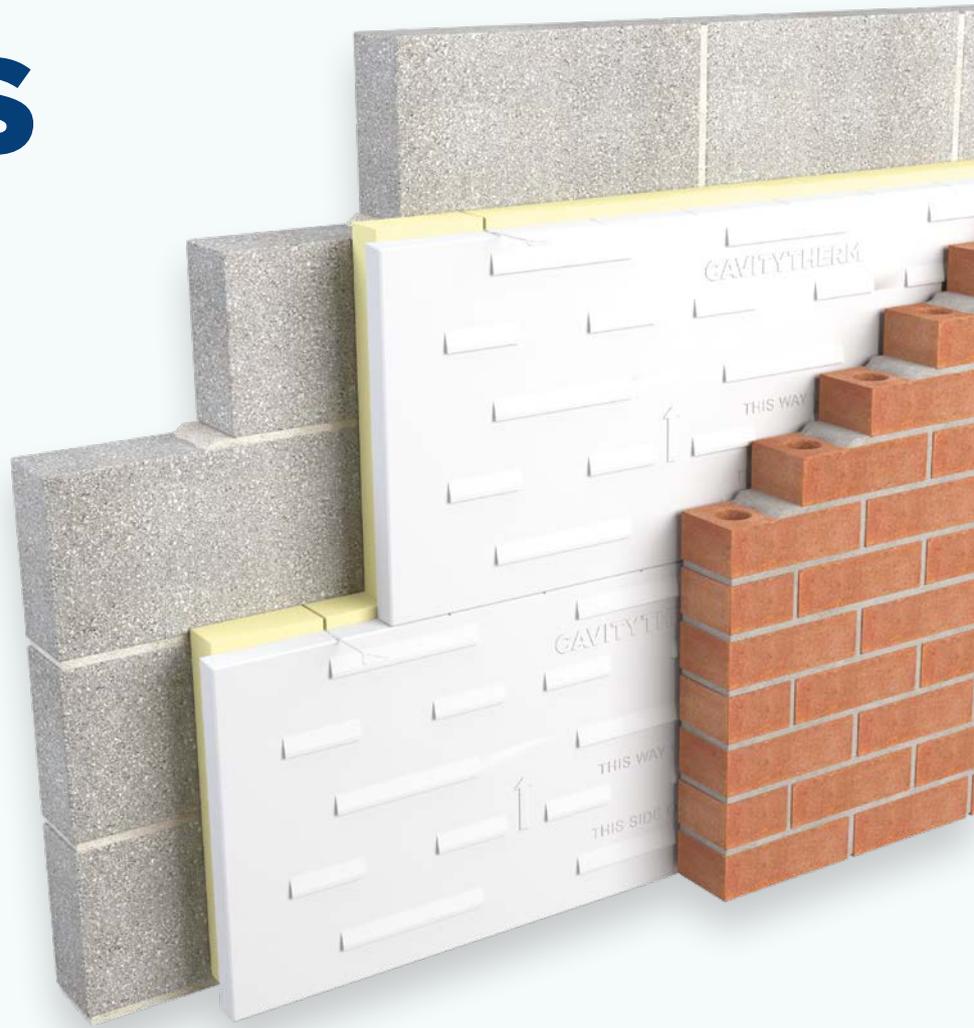

Partial Fill Cavity Walls

■ ECO/CW Partial Fill Cavity Walls	12
■ XO/XW Partial Fill Cavity Walls*	16
■ XO/XWP Partial Fill Cavity Walls*	17
■ XT/CW (T&G) Partial Fill Cavity Walls*	18

Built-in Full Fill Walls

■ ECO/CT Full Fill Cavity Walls*	11
■ CT/PIR Full Fill Cavity Walls*	13

Drylining Walls

■ SR/TBFL-MF	19
■ XT/TL Drylining (Dot & Dab)	20
■ XT/TL-MF Drylining (Mech Fixed)	21

Rainscreen

■ SW/RS Rainscreen	22
--------------------	----

Framing Walls

■ SR/FB Framing Board	23
■ XO/FB Framing Board	24
■ XT/TF Timber Frame	25

External Wall Insulation

■ Warm-R SD E Grey EWB	26
------------------------	----



ECO360 BIO-ENHANCED PIR INSULATION

Full Fill Cavity Walls

Lambda value as low as **0.020 W/mK**

ECO/CT

CavityTherm 360 is a bio-enhanced composite board of enhanced PIR with a thermal conductivity of 0.020 W/mK for full fill cavity wall applications.

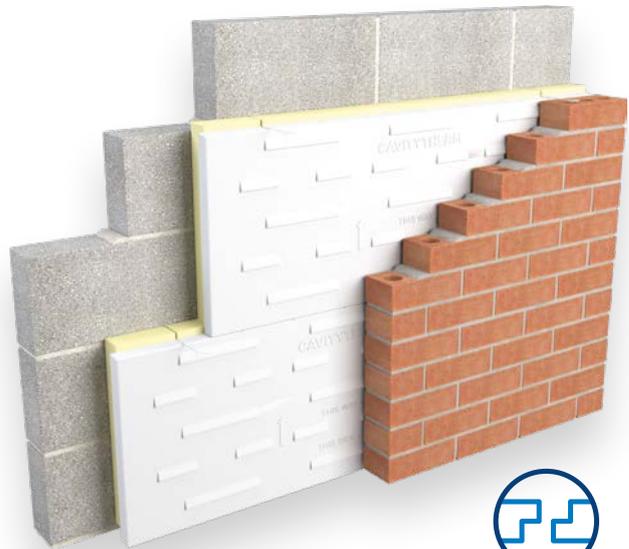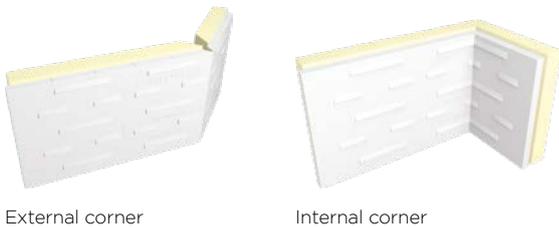

Key Features

- Bio-enhanced PIR insulation
- Halogen free
- Enhanced performance 0.020 W/mK
- Bio-degradable packaging – Reduced packaging materials
- Moisture directed to outer surface
- Fully engineered jointing
- Fully recyclable HIPs facer provides wind-driven rain protection
- Wide range of system compatible accessories that build to a system
- Preformed corner panels available

Specifications

Thermal Conductivity	0.020 W/mK
Facings	Composite Foil/Engineered Hips
Core	Bio-enhanced PIR Insulation
Board Size	1200mm x 450mm
Board Thickness	110, 125, 150mm
Board Profile	Rebate Edge
Preformed Corner	Yes

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

ECO360 BIO-ENHANCED
PIR INSULATION


Partial Fill Cavity Walls

Lambda
value as low as
0.020 W/mK

ECO/CW

Cavity Wall 360 is a bio-enhanced partial fill wall insulation system. The system incorporates textured facings, engineered jointing details, preformed corners and has a thermal conductivity of 0.020 W/mK.

Cavity Wall 360 is an environmentally sound choice for Passive and low energy builds. It can achieve a Passive U-Value of 0.15 W/m²K in a traditional cavity wall. When building with Cavity Wall 360 a residual cavity is maintained, offering effective protection against wind-driven rain.

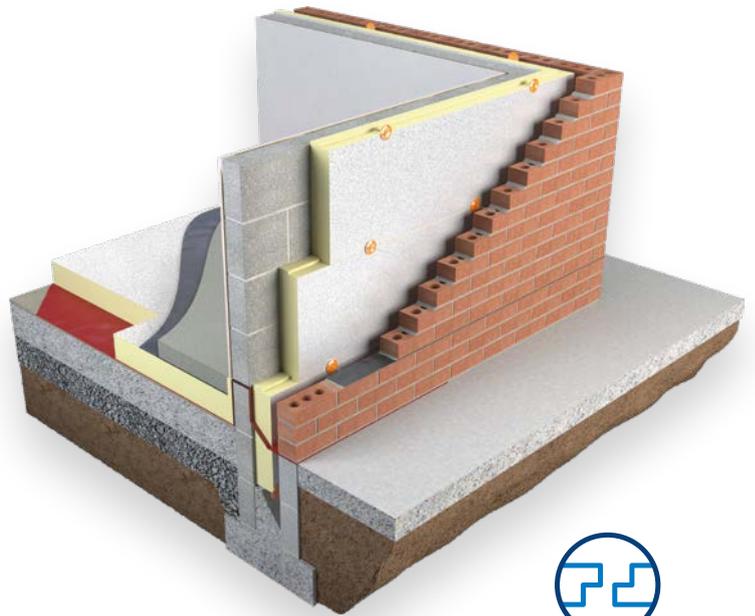

SHIPLAP
JOINING

Key Features

Bio-enhanced PIR insulation

Halogen free

Enhanced performance 0.020 W/mK

Bio-degradable packaging

Clear cavity maintained

Lower Lambda value for improved U-Values

Specifications

Thermal Conductivity	0.020 W/mK
Facings	Textured foil facings
Core	Bio-enhanced PIR Insulation
Board Size	1200mm x 450mm
Board Thickness	100, 110mm
Board Profile	Rebate Edge
Preformed Corner	Yes

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

CAVITYTHERM


BUILT-IN FULL FILL PIR WALL INSULATION

Full Fill Cavity Walls

Lambda value as low as **0.021 W/mK**

CT/PIR

CavityTherm is an innovative built-in insulation for traditional walls that achieves Passive level U-Values as low as 0.13 W/m²K with excellent Thermal Bridging detailing in cavities up to 150mm wide.

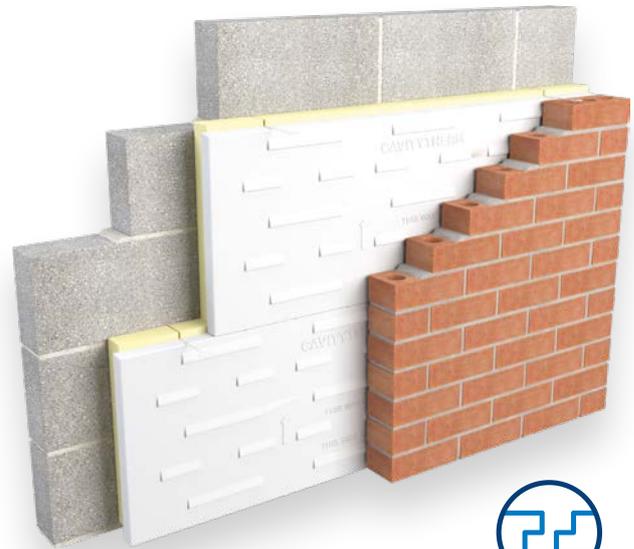

External corner



Internal corner



SHIPLAP JOINTING

Key Features

- Verified EPD available
- Engineered HIPs facer provides wind driven rain protection
- Moisture redirected to outer surface
- Prepositioned slots for sloping wall ties - no creep
- Fully engineered jointing - no reliance on taping*
- Full range of accessory pieces build continuous system
- Excellent Thermal Bridging Values
- Preformed corner panels available

*Where the boards are butt jointed tape is required

Specifications

Thermal Conductivity	0.021 W/mK
Facings	Composite Foil/Engineered Hips
Core	PIR Insulation
Board Size	1200mm x 450mm
Board Thickness	100, 110, 125, 150mm
Board Profile	Rebate Edge
Preformed Corner	Yes

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

CAVITYTHERM BUILT-IN FULL FILL PIR WALL INSULATION

CT/PIR

Builds To A System




✓ Header Panel
Product: CT/ACC/HDP

An accurately cut CavityTherm accessory used for dressing down a stepped DPC above lintels, reducing cost and wastage on site.

Size
1200mm x 225mm

Thicknesses
100mm, 125mm, 150mm



✓ Jointing Strip
Product: CT/ACC/STR

When building from the inner leaf to the outer leaf, board joints can be protected and taped with the jointing strips.

Size
100mm x 450mm




✓ Preformed Corner Panels
Product: CT/PIR/CE & CT/PIR/CI

A preformed panel of CavityTherm that folds to provide a 90° corner either external or internal. The corner boards ensure excellent detailing and provide a template for setting out of outer brickwork.

Size
1200mm x 450mm

Thicknesses
100mm, 110mm, 125mm, 150mm




✓ Meter Box Panels
Product: CT/PIR/MB

The preformed meter box accessory allows a recess space for placement of meter box, leaving the insulation to run in a continuous plane.

Size
1200mm x 600mm

Thicknesses
50mm, 75mm, 100mm

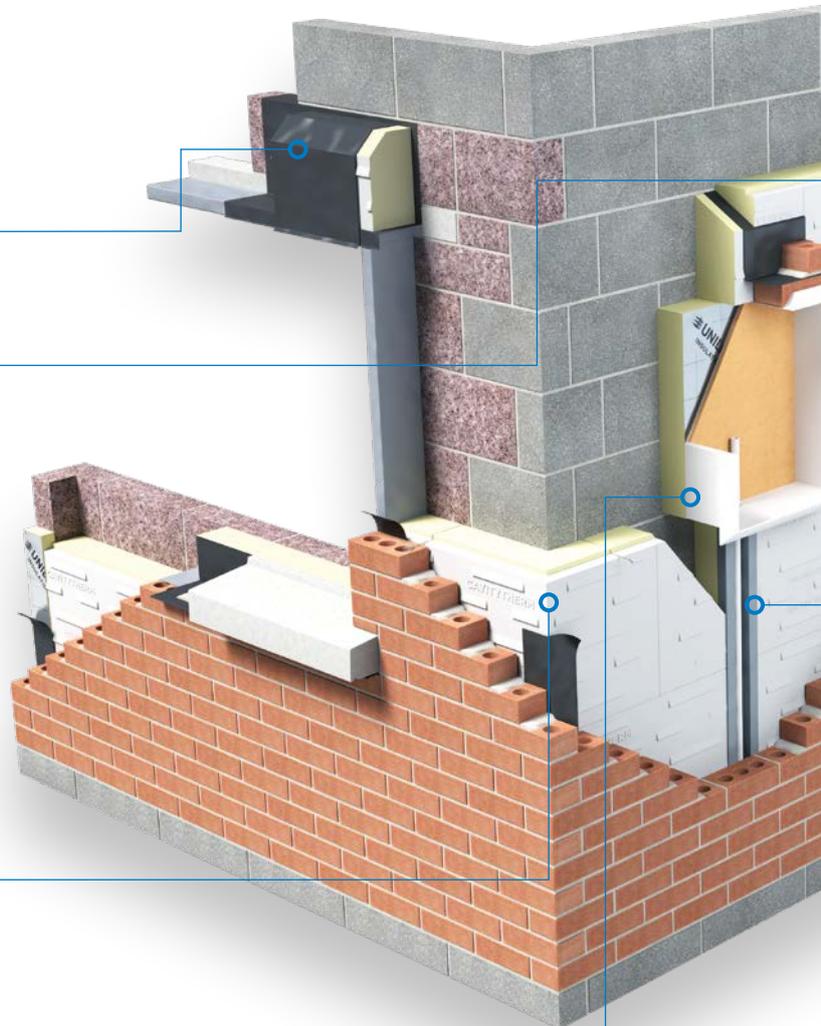



✓ Cavity Tray Channel
Product: CT/ACC/CTC

An insulated channel to allow for insulation continuity around stepped cavity trays at gable junctions.

1200mm	L	Channel Length
100mm	C	Cavity width
350mm	IVH	Internal Void Height
60mm	T	PIR Insulation Thickness

Size	Thicknesses
1200mm L x 100mm C x 350mm IVH x 60mm T	100mm, 110mm, 125mm, 150mm



✓ Hockey Stick Insulation
Product: CTC/ACC/HS

The Hockey service voids allows for easy access to the cable that supplies the meter box and is preformed to fit the insulation.

Size	Thicknesses
1200mm	100mm, 110mm, 125mm, 150mm

Additional Options Also Available:



✓ Service Void Panels
Product: CT/ACC/SP

A preformed panel that creates an insulated Service Void for Periscopic Floor Vents in suspended floor situations.

Size	Thicknesses
375mm x 265mm	45mm



✓ Safe-R Close-R
Product: SR/CR

A high performance EN fire-rated cavity closer providing compliance with structural and thermal regulations in Ireland. Achieved in excess of 4 hour fire rating in a 150mm cavity when tested to EN1366-4.

Size	Thicknesses
1200mm x 200mm	100mm, 110mm, 125mm, 150mm, 75mm Return block

Scan here to find out more about Safe-R Close-R:



✓ Riser Panel Product: CT/PIR/TO/CP

A CavityTherm half-board that is positioned below the DPC at floor levels and allows for the recommended overlap between wall and floor insulation boosting thermal bridging performance and cutting waste.

Size	Thicknesses
1200mm x 225mm	100mm, 110mm, 125mm, 150mm

XTROLINER SUPERIOR PERFORMANCE PIR INSULATION*


Partial Fill Cavity Walls

Lambda
value as low as
0.021 W/mK

XO/XW

XtroWall is an innovative partial fill wall insulation system incorporating textured facings, engineered jointing details, preformed corners and a certified thermal conductivity of 0.021 W/mK.

This lower Lambda improves U-Values and meets Passive house levels, proving a suitable choice for Passive and low energy builds. XtroWall can achieve NZEB Standard in a traditional cavity wall. Building with XtroWall, a residual cavity is maintained, offering effective protection against wind driven rain.

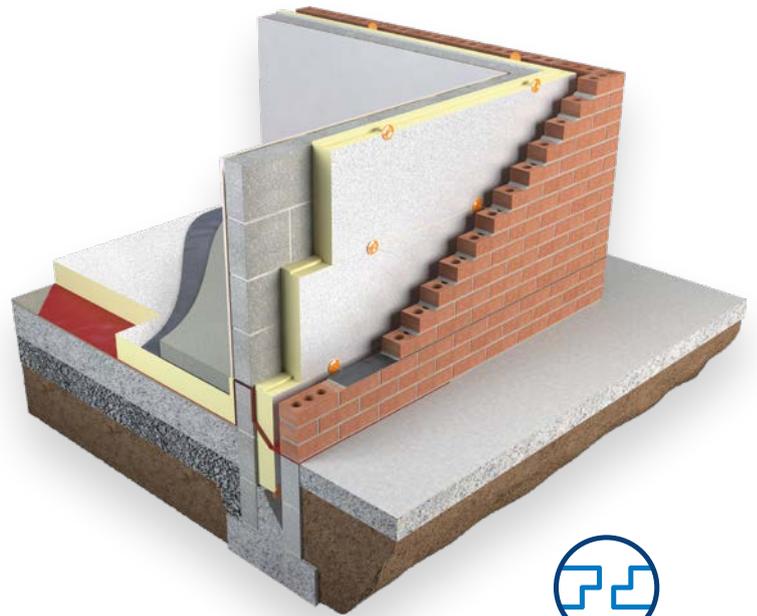

Key Features

Verified EPD available

Reaction to Fire (Euroclass E)

Engineered Jointing

Corner panels and cavity closers: Reduced Thermal Bridging

Clear cavity Maintained

Lower Lambda value for improved U-Values

Textured foil

Specifications

Thermal Conductivity	0.021 W/mK
Facings	Textured foil facings
Core	Superior Performance PIR Insulation
Board Size	1200mm x 450mm
Board Thickness	80, 90, 100mm
Board Profile	Rebate Edge
Preformed Corner	Yes

*The reference to superior performance relates to the product or ranges thermal conductivity or fire performance or a combination of both, when compared to our Thin-R range. Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

XTROLINER[®] SUPERIOR PERFORMANCE PIR INSULATION*


Partial Fill Cavity Walls

Lambda
value as low as
0.020 W/mK

XO/XWP

XtroWall Plus is a superior performance insulation with a thermal conductivity of 0.020 Wm/K. It is faced with a textured aluminium foil and is available with engineered jointing to deliver improved Thermal Bridging detailing.

This lower Lambda improves U-Values and meets NZEB standards, proving a suitable choice for Passive and low energy builds. XtroWall Plus can achieve a passive U-Value of 0.15 W/m²K in a traditional cavity wall. Building with XtroWall Plus, a residual cavity is maintained, offering effective protection against wind driven rain.

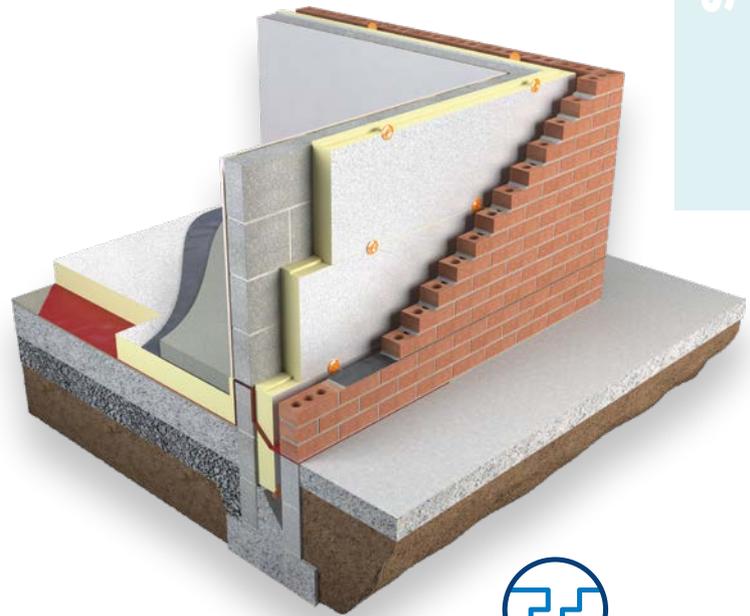

SHIPLAP
JOINTING

Key Features

- Verified EPD available
- Reaction to Fire (Euroclass E)
- Achieves 0.15 U-Value in 150mm Cavity
- Improved Lambda value 0.020 W/mK
- Engineered Jointing
- Corner panels and cavity closers: Reduced Thermal Bridging
- Clear cavity maintained

Specifications

Thermal Conductivity	0.020 W/mK
Facings	Textured foil facings
Core	Superior Performance PIR Insulation
Board Size	1200mm x 450mm
Board Thickness	110mm
Board Profile	Rebate Edge
Preformed Corner	Yes

*The reference to superior performance relates to the product or ranges thermal conductivity or fire performance or a combination of both, when compared to our Thin-R range. Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details


THIN-R PIR INSULATION

Partial Fill Cavity Walls

XT/CW (T&G)

Thin-R Partial Fill Cavity Wall (T&G) Insulation builds to a system thanks to its engineered tongue and grooved joints and preformed corners, ensuring insulation continuity and minimising of Thermal Bridging.

Cavity Wall (T&G) for use in traditional masonry walls, builds to the highest thermal standards whilst maintaining a residual cavity, offering protection from wind driven rain.

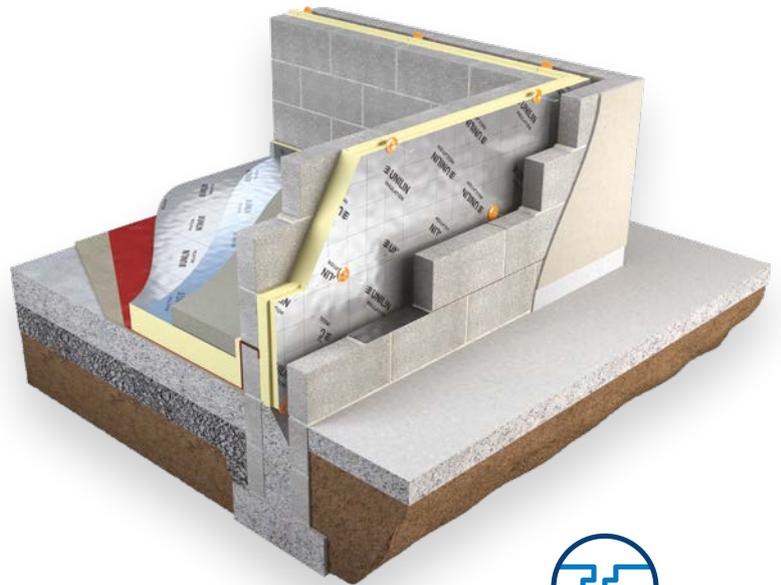

Key Features

- Verified EPD available
- Robust Tongue & Groove Jointing
- Corner panels and cavity closers: Reduced Thermal Bridging
- Clear cavity maintained
- No exposure restrictions
- Low emissivity foil facings

Specifications

Thermal Conductivity	0.022 W/mK
Facings	Composite foil facings
Core	PIR Insulation
Board Size	1200mm x 450mm
Board Thickness	60, 70, 80, 90, 100, 110, 120, 125mm
Board Profile	Tongue & Groove
Preformed Corner	Yes

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

SAFE-R PHENOLIC INSULATION**Drylining Walls**

(Installed with Adhesive Dabs or Mechanically Fixed)

Lambda
value as low as
0.020 W/mK**SR/TBFL-MF**

Safe-R Fireline Thermal Laminate is a composite insulated panel comprising of a rigid Phenolic core and 15mm Fireline plasterboard achieving a Euroclass B s1 d0 reaction to fire classification for internal applications. The superior thermal performance provides improved U-Values with minimal intrusion into valuable living space.

Safe-R Fireline Thermal Laminate achieved a REI 45 fire resistance in a system for ceiling and roof application in accordance with TGD B. This product is designed to provide high levels of thermal insulation and drylining in one operation, with the added assurance of high fire performance combined with improved thermal values.

**Key Features**

Verified EPD is available for the product insulation

Reaction to Fire (Euroclass) B-s1, d0

High performance to thickness ratio - Space saving

Superior thermal performance of 0.020-0.021 W/mK

Specifications

Thermal Conductivity	0.020 - 0.021 W/mK
Facings	Composite foil facings/ Fireline plasterboard
Core	Phenolic Insulation
Board Size	2400mm x 1200mm
Board Thickness	50, 60, 70, 80, 100mm
Board Profile	Square Edge
Plasterboard	Tapered Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

THIN-R PIR INSULATION

Drylining Walls Fixed with Adhesive Dabs

XT/TL

Thin-R Thermal Liner (Dot & Dab) is a composite insulated panel of Unilin PIR insulation core with a composite kraft facing bonded to 12.5mm tapered edge plasterboard for internal applications, fixed with proprietary adhesive bonding.



Key Features

Verified EPD is available for the product insulation

Reaction to Fire (Euroclass) B-s1, d0

Insulation & Drylining in one application

Provides effective vapour control layer

Reduced insulation thickness

Suitable for a variety of wall types

Solution in refurbishment and new build

Specifications

Thermal Conductivity	0.022 W/mK
Facings	Composite Kraft/Plasterboard
Core	PIR Insulation
Board Size	2438mm x 1200mm
Board Thickness	37.5, 50.5, 62.5, 72.5, 82.5 and 92.5mm (Thickness includes 12.5mm plasterboard)
Board Profile	Square Edge
Plasterboard	Tapered Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

THIN-R ^{PIR} INSULATION

Drylining Walls – Mechanically Fixed

XT/TL-MF

Thin-R Thermal Liner (Mechanically Fixed) is a composite insulated panel of Unilin PIR insulation core with a composite foil facing bonded to 12.5mm tapered edge plasterboard for internal walls, sloped roofs and ceilings. This product is only suitable for mechanically fixed applications.



Key Features

- Verified EPD is available for the product insulation
- Reaction to Fire (Euroclass) B-s1, d0
- Insulation & Drylining in one application
- Provides effective vapour control layer
- Reduced insulation thickness
- Suitable for a variety of wall types
- Solution in refurbishment and new build

Specifications

Thermal Conductivity	0.022 W/mK
Facings	Composite Foil/Plasterboard
Core	PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	37.5, 42.5, 52.5, 62.5, 72.5, 82.5, 92.5, 102.5, 112.5mm (Thickness includes 12.5mm plasterboard)
Board Profile	Square Edge
Plasterboard	Tapered Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details


STONEWOOL NON-COMBUSTIBLE INSULATION

Ventilated Rainscreen Cladding

SW/RS

Unilin's range of non-combustible, Euroclass 'A1' stonewool insulation provides surety when the highest fire performance is required. Stonewool Rainscreen insulation is suitable for use in ventilated facade, rainscreen and framing applications and closed systems such as curtain walling.

Unilin's Stonewool insulation provides a robust, uniform, high density solution throughout the product providing resilience during the build process for the application of mechanically fixed substrates.

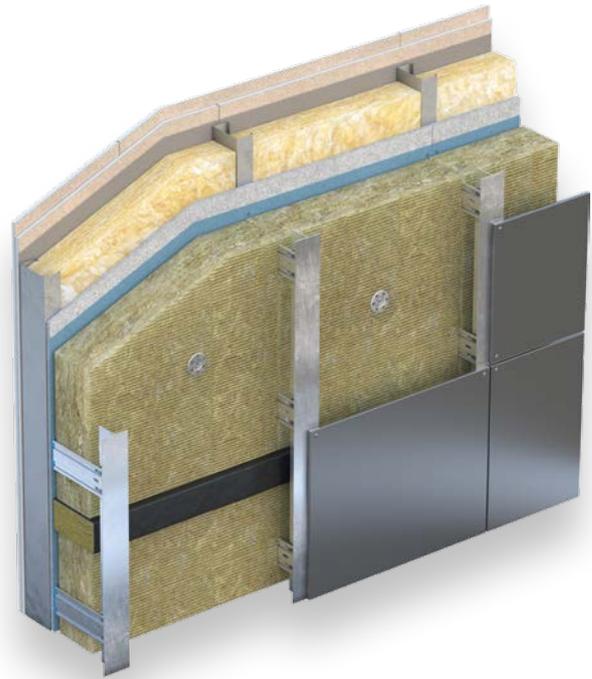

Key Features

Euroclass A1 Fire classification

Robust high density

Improved acoustic performance

Suitable for use in high rise buildings

Specifications

Thermal Conductivity	0.036 W/mK
Board Size	1200mm x 600mm
Board Thickness	50, 75, 100, 125, 150mm
Board Profile	Square Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

SAFE-R PHENOLIC INSULATION


Steel & Timber Frame

Lambda
value as low as
0.020 W/mK

SR/FB

Safe-R Framing Board is designed for use with steel or timber frame applications up to 15m in height. With a Euroclass C Fire Classification the framing board can be used between studs or as an insulated sheathing board. Using Safe-R Framing Board provides excellent U-Values and improved Thermal Bridging detailing.

The use of combustible insulation is restricted on high buildings and buildings of a certain use. Regulations will differ regionally. Seek the guidance of the project architect or engineer before proceeding.

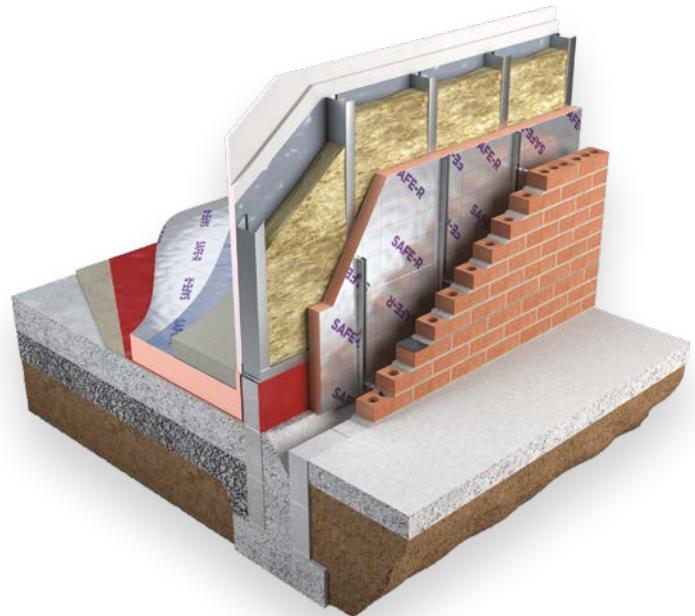**Key Features**

Verified EPD available

Suitable for use in steel and timber frame systems up to 15m in height

Lower Lambda value for improved U-Values

Reaction to Fire (Euroclass) C-s1, d0

Reduced Thermal Bridging

Combustible materials have height restrictions. Please contact our Technical Team for more information.

Specifications

Thermal Conductivity	0.020 - 0.021 W/mK
Facings	Composite foil facings
Core	Phenolic Insulation
Board Size	2400mm x 1200mm
Board Thickness	50, 60, 75, 80, 100, 120, 140mm
Board Profile	Square Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

XTROLINER

SUPERIOR PERFORMANCE
PIR INSULATION*

Steel & Timber Frame

Lambda
value as low as
0.021 W/mK

XO/FB

XtroLiner Framing Board is designed for use in a wide range of construction including steel or timber frame applications up to 15m in height. The framing board can be used between studs or as an insulated sheathing board. Using XtroLiner Framing Board in this application will reduce the Thermal Bridging of the steel or timber studs.

The use of combustible insulation is restricted on high buildings and buildings of a certain use. Regulations will differ regionally. Seek the guidance of the project architect or engineer before proceeding.



Key Features

Verified EPD available

Reaction to Fire (Euroclass) C-s2, d0

Suitable for use in steel and timber frame systems.

Lower Lambda value for improved U-Values

Suitable for new build and renovation up to 15m in height

Reduced Thermal Bridging

Textured foil

Combustible materials have height restrictions. Please contact our Technical Team for more information.

Specifications

Thermal Conductivity	0.021 W/mK
Facings	Textured foil facings
Core	Superior Performance PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	50, 60, 75, 80, 100, 120, 140mm
Board Profile	Square Edge

*The reference to superior performance relates to the product or ranges thermal conductivity or fire performance or a combination of both, when compared to our Thin-R range. Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details


THIN-R PIR INSULATION

Timber Framed Walls

XT/TF

Timber Frame construction is a fast, systematic method that results in high performing buildings with regard to energy efficiency and in environmental terms.

Unilin's Timber Frame Systems bring timber framed wall insulation performance to new levels, surpassing the default values asked for in current building regulations. Using this product in timber framed walls helps achieve NZEB fabric standards and Passive House Standards.

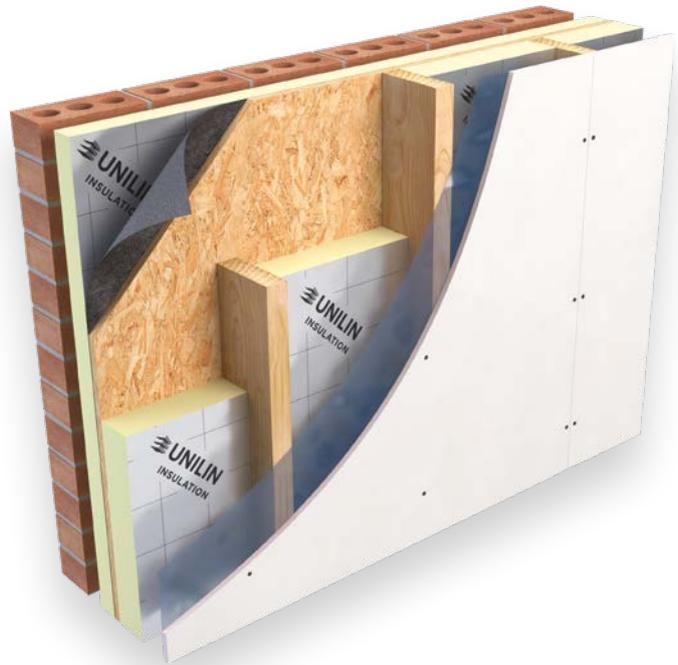

Key Features

- Verified EPD available
- Rapid build system
- Approved for use with fibre in stud
- Suitable for new build and renovation
- Reduced insulation thickness
- Low emissivity foil facings

Specifications

Thermal Conductivity	0.022 W/mK
Facings	Low emissivity foil facings
Core	PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	25, 30, 40, 50, 60, 70, 75, 80, 90, 100, 110, 125, 150mm
Board Profile	Square Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details


EPS EXPANDED POLYSTYRENE
INSULATION

External Wall Insulation

WARM-R SD E GREY EWB

Warm-R SD E Grey EWB is a high quality expanded Polystyrene containing integrated graphite within the cell structure that reflects and absorbs radiant heat resulting in an improved thermal insulation performance.

This board is an Expanded Polystyrene with Graphite/Carbon Enhancement. The graphite particles act as infrared absorbers to reduce heat dissipation caused by the radiation. This improves the thermal conductivity of the board to 0.031 W/mK, an improvement on conventional expanded polystyrene products.

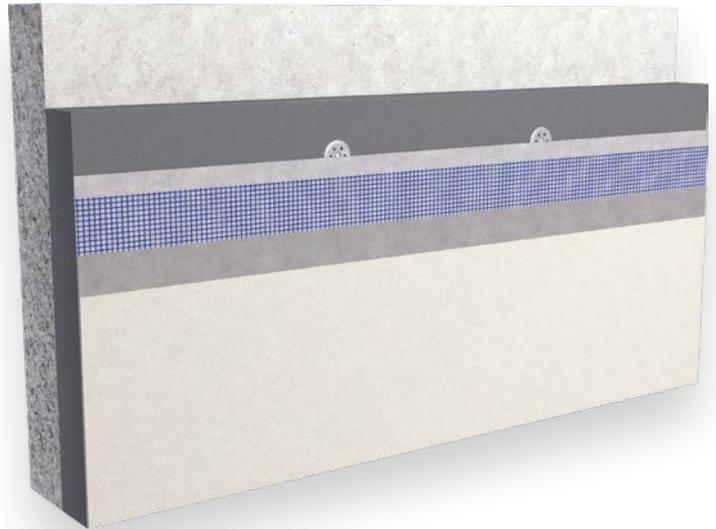

Key Features

Extensive range of sizes and thicknesses

Thermal conductivity of 0.031 W/mK

Specifications

Thermal Conductivity	0.031 W/mK
Core	EPS
Board Size	2400mm x 1200mm 1800mm x 1200mm
Board Thickness	80, 100, 120, 140, 220mm
Board Profile	Straight Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

PITCHED ROOFS



Pitched Roofs

■ ECO/MA Pitched Roof	28
■ ECO/MA Sarking Warm Roof Construction	29
■ XO/PR Pitched Roof	30
■ XO/SK Sarking (T&G)	31
■ XT/PR_UF Pitched Roof	32
■ XT/RLOC Pitched Roof	33

ECO360 BIO-ENHANCED PIR INSULATION


Pitched Roofs

Lambda value as low as **0.020 W/mK**

ECO/MA

Bio-enhanced, PIR insulation suitable for pitched roofs (ventilated, hybrid or warm). ECO360 MA for roofs offers improved insulation performance with a thermal conductivity as low as 0.020 W/mK.

Using pioneering environmentally conscious technology, ECO360 MA in roof applications will reduce heat loss while also delivering improved Thermal Bridging details.

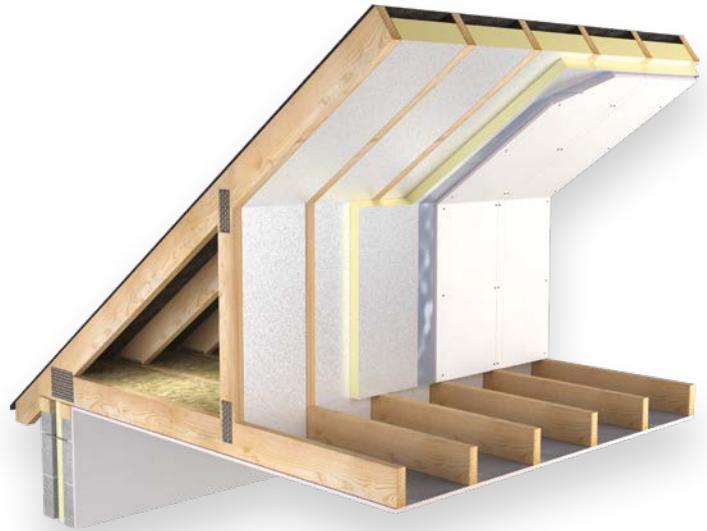

Key Features

- Bio-enhanced PIR insulation
- Halogen free
- Enhanced performance as low as 0.020 W/mK
- Bio-degradable packaging – Reduced packaging materials
- High compressive strength

Specifications

Thermal Conductivity	As low as 0.020 W/mK
Facings	Textured foil facings
Core	Bio-enhanced PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	50*, 100, 125, 150mm
Board Profile	Square Edge

*The thermal performance of the 50mm thickness is 0.023 W/mK

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

ECO360 BIO-ENHANCED PIR INSULATION

Lambda value as low as **0.020 W/mK**

Sarking Warm Roof Construction

ECO/MA

Bio-enhanced, PIR insulation suitable for Sarking Warm Roof construction. ECO360 MA, with a thermal conductivity as low as 0.020 W/mK, in a sarking warm roof application offers an environmentally conscious solution which provides improved detailing, speed of installation and a uniform plane to accommodate more efficient detailing.

This bio-enhanced insulation combines high compressive strength with low thermal conductivity, providing an effective solution for roof insulation.



ROOFS

Key Features

- Bio-enhanced PIR insulation
- Halogen free
- Enhanced performance as low as 0.020 W/mK
- Bio-degradable packaging – Reduced packaging materials
- High compressive strength
- Suitable for pitched roofs

Specifications

Thermal Conductivity	0.020 W/mK
Facings	Textured foil facings
Core	Bio-enhanced PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	100, 125, 150mm
Board Profile	Square Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

XTROLINER

SUPERIOR PERFORMANCE
PIR INSULATION*


Pitched Roofs

Lambda
value as low as
0.021 W/mK

XO/PR

XtroLiner Pitched Roof on sloped roofs (ventilated, hybrid or warm) provides the most efficient U-Values with minimal intrusion into valuable living space.

The roof construction is a critical element in the building fabric and is an area at high risk of heat loss. Using XtroLiner Pitched Roof will reduce heat loss while also delivering improved Thermal Bridging details.

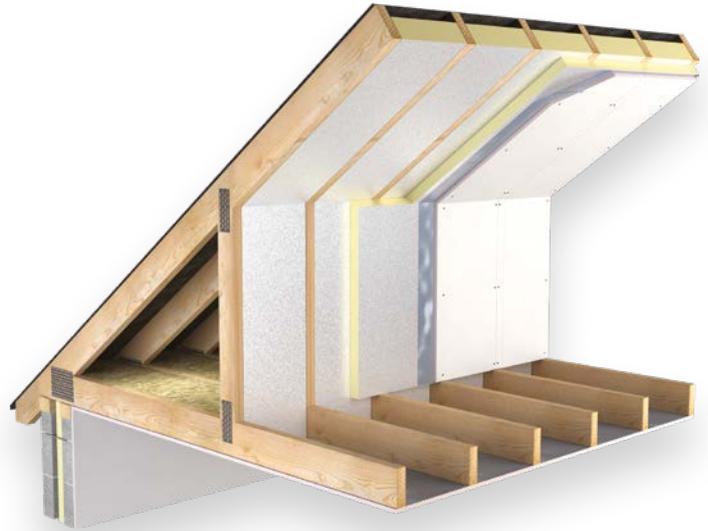

Key Features

- Verified EPD available
- Reaction to Fire (Euroclass) C-s2, d0
- Reduces intrusion into living area
- Reduced risk of condensation
- Textured foil facings
- Reduced Thermal Bridging

Specifications

Thermal Conductivity	0.021 W/mK
Compressive Strength	CS (10\Y) 150
Facings	Textured foil facings
Core	Superior Performance PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	25, 40, 50, 60, 70, 75, 80, 100, 120mm
Board Profile	Square Edge

*The reference to superior performance relates to the product or ranges thermal conductivity or fire performance or a combination of both, when compared to our Thin-R range. Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

XTROLINER SUPERIOR PERFORMANCE PIR INSULATION*


Lambda value as low as **0.021 W/mK**

Sarking Warm Roof Construction

XO/SK (T&G)

XtroLiner Sarking (T&G) is an engineered tongue and grooved external roof insulation system with textured facings which meets the passive U-Value of 0.15 W/m²K.

Using this product improves detailing, speeds up the installation process and provides a uniform plane to detail more effectively. Creating a warm roof reduces the normal amount of junctions prone to Thermal Bridging greatly improving the thermal performance of the roof.

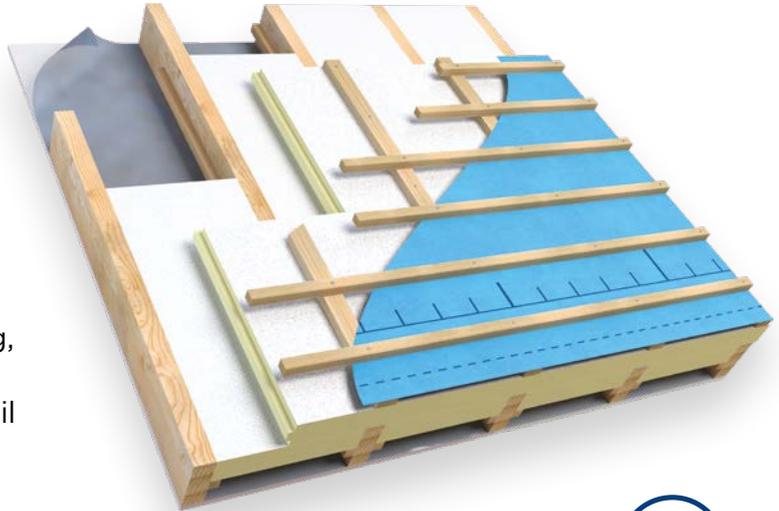

ROOFS

Key Features

- Verified EPD available
- Reaction to Fire (Euroclass) C-s2, d0
- Tongue & groove jointing
- Reduced risk of condensation
- Avoids intrusion into living area
- Improved U-Value in roofs
- Reduced Thermal Bridging

Specifications

Thermal Conductivity	0.021 W/mK
Compressive Strength	CS (10\Y) 150
Facings	Textured foil facings
Core	Superior Performance PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	50, 75, 100, 125mm
Board Profile	Tongue & Groove

*The reference to superior performance relates to the product or ranges thermal conductivity or fire performance or a combination of both, when compared to our Thin-R range. Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

THIN-R^{PIR} INSULATION

Pitched Roofs

XT/PR_UF (ROOFS)

Thin-R Pitched Roof on sloped roofs (ventilated, hybrid or warm) provides the most efficient U-Values with minimal intrusion into valuable living space.

The roof construction is a critical element in the building fabric and is an area at high risk of heat loss. Using this product will reduce heat loss while also delivering improved Thermal Bridging details.



Key Features

- Verified EPD available
- Avoids intrusion into living area
- Reduced risk of condensation
- Composite foil facings
- Reduced Thermal Bridging

Specifications

Thermal Conductivity	0.022 W/mK
Compressive Strength	CS (10\Y) 140
Facings	Composite foil facings
Core	PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	25, 30, 40, 50, 60, 70, 75, 80, 90, 100, 125, 150mm
Board Profile	Square Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details


RAFTERLOC

Pitched Roof Board

XT/RLOC

Unilin Rafterloc Pitched Roof Insulation has a unique width variation feature offering a 20-30mm adjustment margin to ensure a tight fitting, high performance insulation locked between rafters.

Used in conjunction with a layer of Unilin XT/TL or XT/PR_UF below the rafters, the Rafterloc system provides a suitable solution to insulating sloped rafters to the most efficient standards with minimal wastage and reduced fitting time.

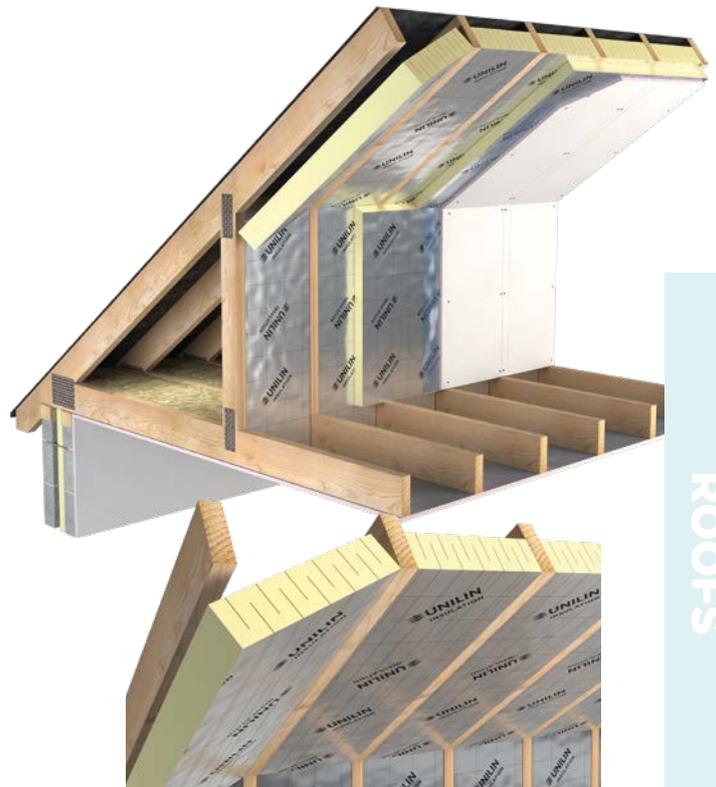

Key Features

Variable width feature

Minimal intrusion into living area

Composite foil facings


Extra thermal performance

Specifications

Thermal Conductivity	0.023 W/mK
Facings	Composite foil facings
Core	PIR Insulation
Board Size	1200mm x 370mm
Board Thickness	100, 125, 150mm
Board Profile	Square Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

FLAT ROOFS

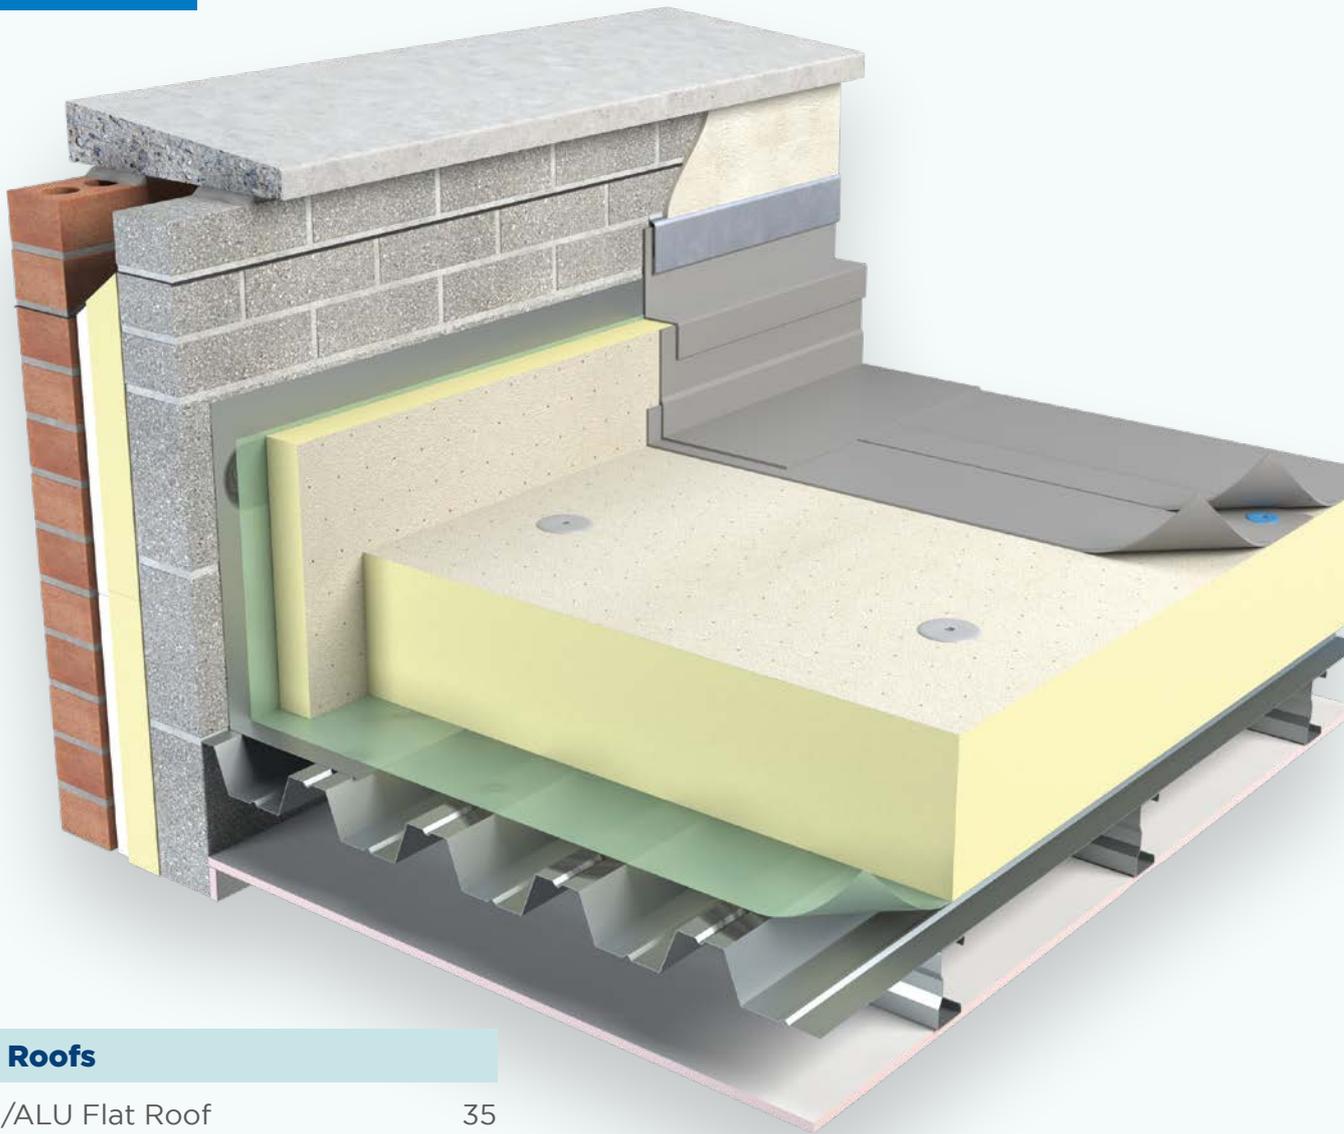

Flat Roofs


■ FR/ALU Flat Roof	35
■ FR/MG Flat Roof	36
■ FR/BGM Flat Roof	37
■ XO/XD Flat Roof	38
■ Xtrafall	39

THIN-R^{PIR} INSULATION

Mechanically Fixed Single Ply Waterproofing Systems

FR/ALU

Flat Roof ALU is a Polyisocyanurate flat roof insulation with vapour-tight aluminium foil facings suitable for use with single ply membranes. Flat Roof ALU is part of the comprehensive range of Unilin’s flat roof boards providing total solutions for flat roof projects.

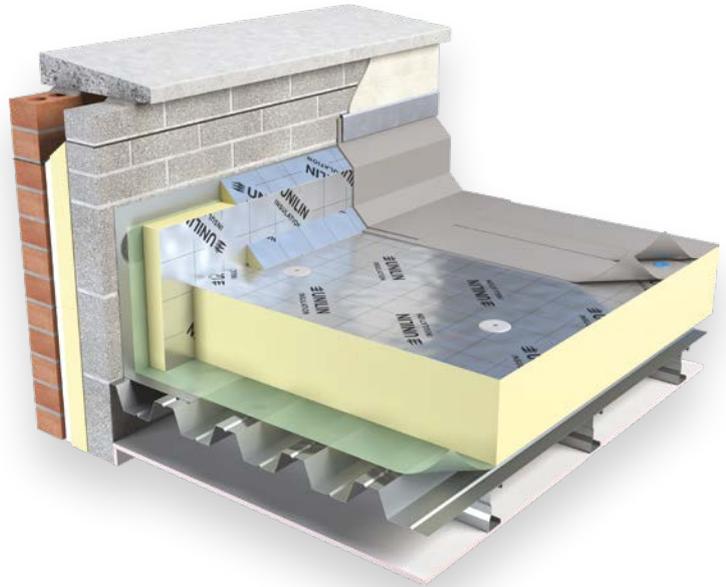

Key Features

Verified EPD available

High Thermal Performance

Compatible with mechanically fixed single ply systems. Loose laid ballasted systems

Vapour resistant foil facers

Specifications

Thermal Conductivity	0.022 W/mK
Compressive Strength	CS (10\Y) 150
Facings	Vapour-Resistant aluminium foil facings
Core	PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	25, 30, 40, 50, 60, 70, 75, 80, 90, 100, 110, 120, 125, 130, 140, 150mm
Board Profile	Square Edge


Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

THIN-R ^{PIR} INSULATION

Single Ply Fully Adhered/Partially Bonded Built-Up Felt Systems

FR/MG

Flat Roof MG is a Polyisocyanurate flat roof insulation with mineral coated glass facers suitable for use below single ply waterproofing systems (mechanically fixed or fully adhered) and partially bonded built-up felt.

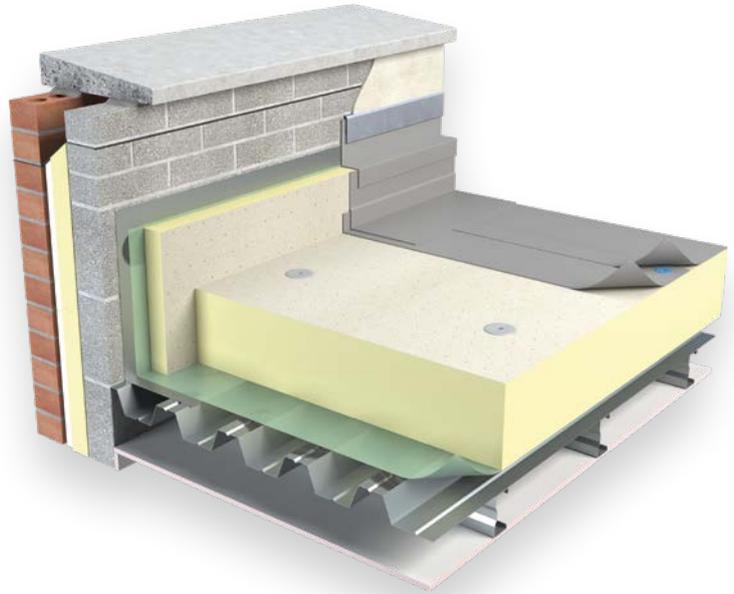

Key Features

Verified EPD available

High Thermal Performance

Compatible with adhesively bonded single ply roofing membranes laid on mechanically fixed or adhered boards

Specifications

Thermal Conductivity	0.024 - 0.027 W/mK
Compressive Strength	CS (10\Y) 150
Facings	Mineral Glass
Core	PIR Insulation
Board Size	1200mm x 1200mm
Board Thickness	25, 50, 60, 70, 80, 90, 100, 110, 120, 130, 140, 150mm
Board Profile	Square Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

THIN-R ^{PIR} INSULATION

Partially Bonded, Torched-on, Built-up Bituminous Felt Systems

FR/BGM

Flat Roof BGM is faced with a polypropylene fleece finished bitumen/glass working surface and a mineral glass facing to the under side. Flat Roof BGM is part of Unilin’s comprehensive range of flat roof boards providing total solutions for flat roof projects.



Mineral glass facing to the under side of BGM board.

Key Features

- Verified EPD available
- High Thermal Performance
- Compatible with most bituminous based roofing systems
- Fleece finished bitumen/glass fibre facings

Specifications

Thermal Conductivity	0.024 - 0.027 W/mK
Compressive Strength	CS (10\Y) 150
Facings	Mineral Glass/Bitumen Glass
Core	PIR Insulation
Board Size	1200mm x 1200mm
Board Thickness	25, 50, 60, 70, 80, 90, 100, 110, 120, 130, 140, 150mm
Board Profile	Square Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details


XTROLINER SUPERIOR PERFORMANCE PIR INSULATION*

Lambda
value as low as
0.021 W/mK

Partially Bonded, Self Adhered, Built-up Bituminous Felt Systems

XO/XD

XtroDeck is faced with an embossed aluminium facing on both sides. XtroDeck is part of Unilin's comprehensive range of flat roof boards providing total solutions for flat roof projects.

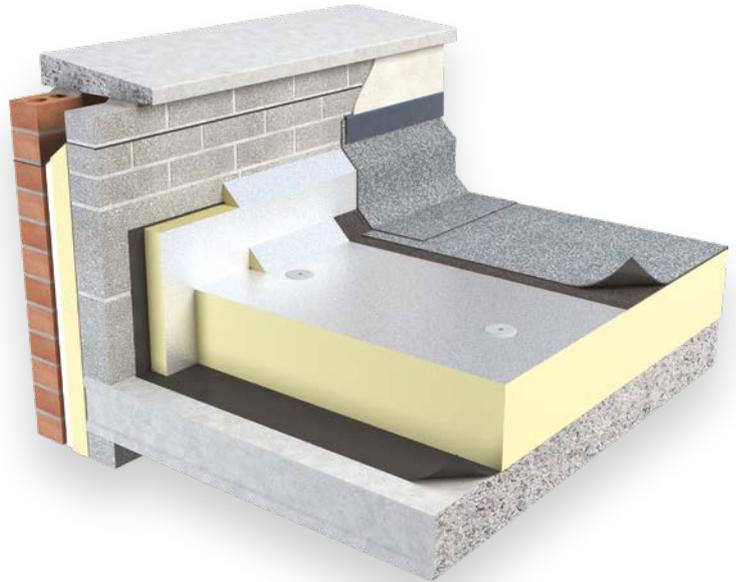

Key Features

Verified EPD available

Reaction to Fire (Euroclass) C-s2, d0

Superior Performance PIR Insulation

Compatible with most bituminous based roofing systems containing self adhered underlays with heat activated cap sheets

Specifications

Thermal Conductivity	0.021 W/mK
Compressive Strength	CS (10\Y) 150
Facings	Textured foil facings
Core	PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	25, 50, 60, 70, 80, 90, 100, 110, 120, 130, 140, 150mm
Board Profile	Square Edge

*The reference to superior performance relates to the product or ranges thermal conductivity or fire performance or a combination of both, when compared to our Thin-R range. Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

XTRAFALL TAPERED ROOFING SYSTEM

Flat Roofs

The XtraFall Taper System provides the designer and contractor with a precise, technically excellent solution to providing thermal insulation and bespoke drainage on flat roofing that avoids water retention and consequent damage in traditional flat roofs.

The factory formed, single layer system, manufactured under the highest ISO quality standards provides the quality assurance that is more difficult to achieve with on-site built-up systems.

Designing 'cut-to-fall' schemes to result in a roof that is thermally efficient, manages water drainage and is cost effective may seem daunting, that is where we come in. Unilin offer a comprehensive range of high performance PIR Flat Roof insulation boards that includes the XF range of tapered insulation, providing comprehensive solutions for all flat roof projects, whatever the choice of waterproofing system.

Our extensive range of high performance PIR foam insulation products with unique performance characteristics has been engineered to meet any project specification.

The XF system is supported by a range of ancillary products, designed to ensure continuous thermal insulation and complete roof drainage. These products are exclusive to the XtraFall system.



XTRAFALL TAPERED ROOFING SYSTEM

Key Features

Highest Performance Rigid PIR Insulation

Practical Solution: flat roof insulation and drainage in a single system

A cost effective solution to creating drainage falls with excellent U-Values

Factory bonded components, manufactured to precision tolerances

Factory made, quality assured single component system

Quality Assurance of mechanical properties of component bonding


Pre-mitred, hips, valleys and extensive range of accessory pieces

Rigid, lightweight material, accepting maintenance traffic

Suitable for new and existing flat roofs

Verified EPD available

BBA Assured Technical Team

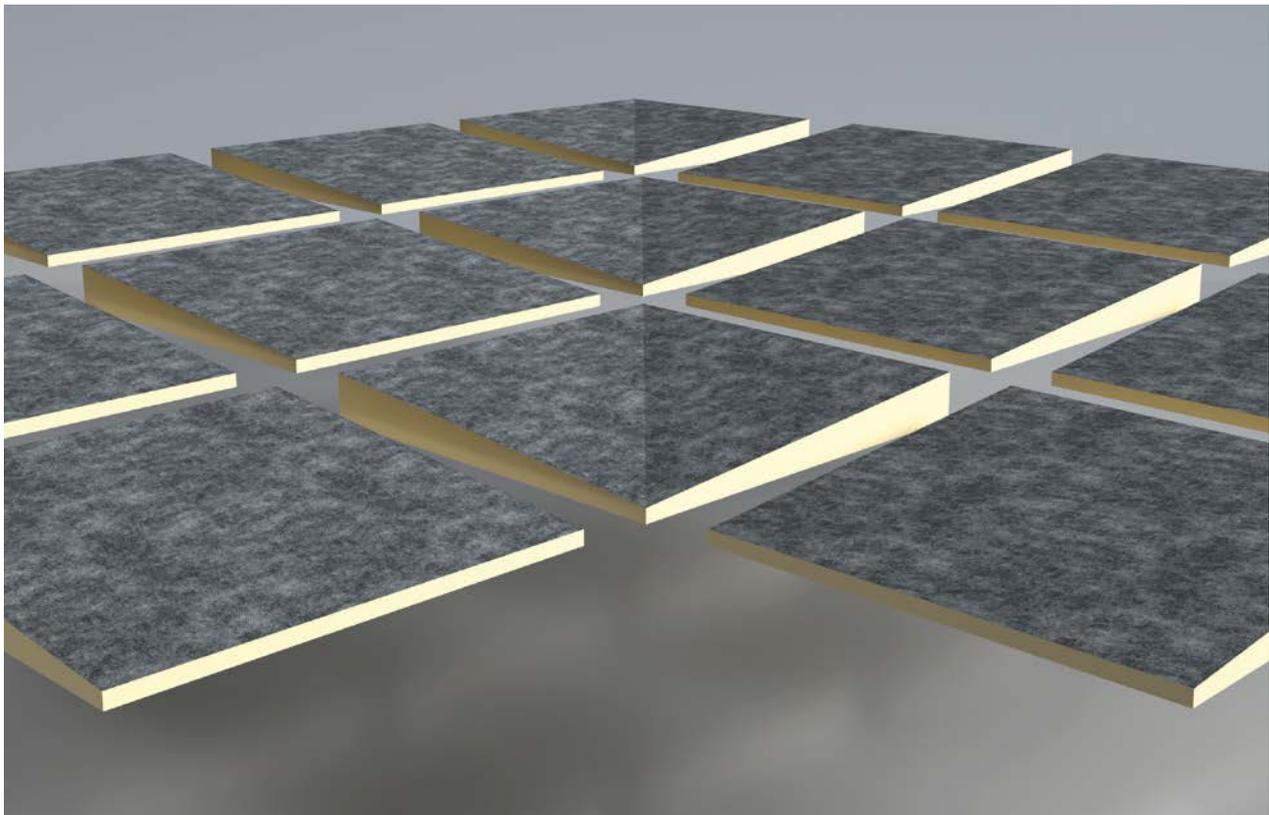

XTRAFALL TAPERED BOARDS

XF/ALU

Tapered Insulation for Mechanically Fixed Single Ply Waterproofing Systems

- Aluminium faced rigid PIR
- Thermal Conductivity 0.022 W/mK
- Compatible with Single Ply Waterproofing Systems



XF/BGM

Tapered Insulation for Bonded, Torched-on, Built-up Bituminous Felt Systems


- Bituminous faced rigid PIR
- Thermal Conductivity as low as 0.024 W/mK
- Compatible with most Bituminous based Roofing Systems



XF/MG

Tapered Insulation for Single Ply Fully Adhered/ Partially Bonded Built-up Felt Systems

- Mineral glass tissue faced rigid PIR
- Thermal Conductivity as low as 0.024 W/mK
- Compatible with Adhesively Bonded/ Mechanically Fixed Single Ply Roofing Membranes

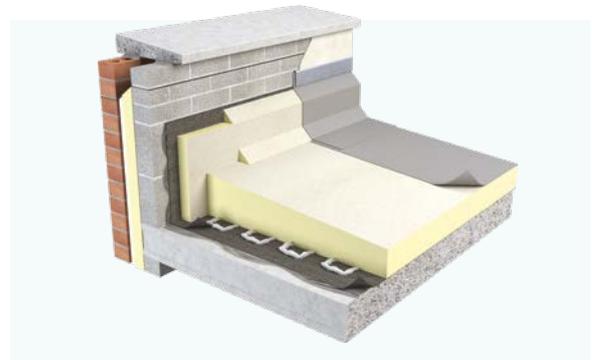

XTRAFALL MITRES

Prefabricated composite falls PIR tapered insulation boards

Ridge/Valley Boards

Xtra-mitre Ridge / Valley boards are prefabricated composite falls PIR tapered insulation boards. Xtra-mitre boards are an integral part of the XtraFall tapered roof insulation system. The construction of the Xtra-mitre board is faced PIR insulation with in-built composite falls. Xtra-mitre boards are made to suit the full range of XtraFall board thicknesses. Mitred board size 1200 x 1200.

XtraFall system of tapered insulation boards, due to a graduated thickness, will cause positive drainage falls on flat roofs. Xtra-mitres are prefabricated to allow changes in direction of drainage falls, without on-site cutting of XtraFall insulation boards, with the associated labour and waste costs. Each Xtra-mitre board is clearly identified by board type and the direction of fall.

Xtra-mitre boards are placed in the appropriate location on the roof, then the XtraFall Tapered Insulation boards are placed to suit.

The XtraFall boards are then “laid away” from the Xtra-mitre boards as dictated by the XtraFall Layout drawing and the topography of the roof. Xtra-mitre boards and XtraFall boards are always used in conjunction with roof insulation layout drawings.


It should be noted that correct, on-site, setting out of the laying pattern, of XtraFall boards, is essential to quick and efficient placing of the insulation. The roofing contractor must ensure that the information/drawing provided is relevant to the on-site works.

Benefits


- Good roof drainage
- Quick board laying
- Reduced on-site cutting
- Lower labour costs
- Versatile systems

Features

- Creates multi-directional falls
- Exact dimensions
- Clear board identification
- Easily installed
- Suitable for all roof Specs

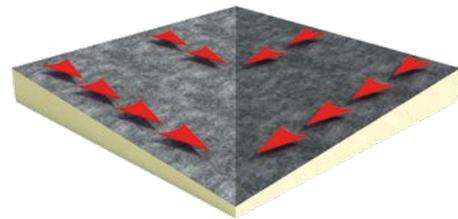

Valley Board

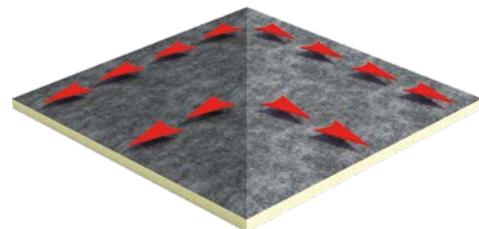

Ridge Board

Fillet

An insulated angle fillet, suitable for all applications where acute angle directional changes are required by bituminous roof membranes, to avoid stress-nodes. Each fillet is 1200 long and 50mm in vertical depth. The facing of bituminous glass tissue allows perfect bonding to the waterproof membrane.



BG Facer shown - also available MG

DRAINAGE DESIGN


Individually engineered, pre-mapped components providing a high tolerance precision solution to roof drainage.

Cut-to-fall schemes designed specific to your requirements



Unilin provide individually engineered pieces, when installed in accordance with comprehensive laydown mapping to ensure designed intent is actually achieved on site.

The precision manufacturing of single piece components provide accuracy and fixing surety not achievable when multi-layer systems are formed on site under our often challenging weather conditions. Complex, geometrical patterns are pre-formed under controlled factory conditions to provide a technically excellent, cost effective method of providing effective flat roof insulation and drainage solutions with improved speed of installation.


Working closely with the project design team, experienced Unilin Technical staff provide expertise in providing solutions to roof drainage in the most cost effective, thermally efficient method possible, backed by accredited calculations for U-Values, condensation and Thermal Bridging.

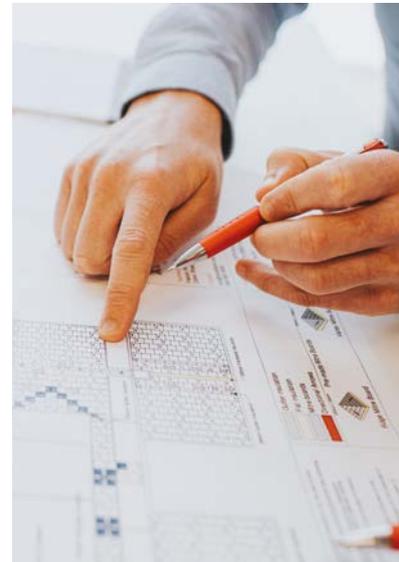

Unilin Technical Team members are a valuable resource that can be called upon to advise from the initial consultation to formulate design strategies. They will assist you right through providing comprehensive layout schemes for the contractor to simplify the installation of complex drainage courses, all backed by third party calculation.

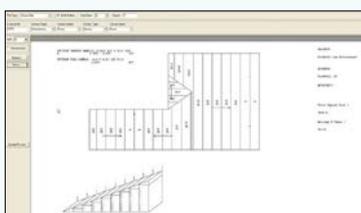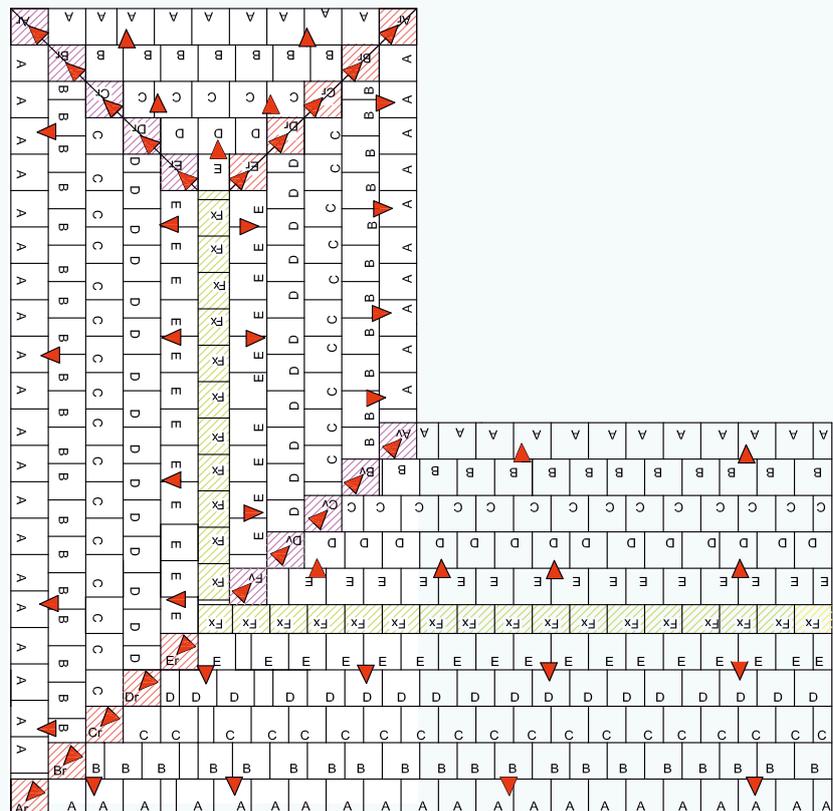

FLOORS

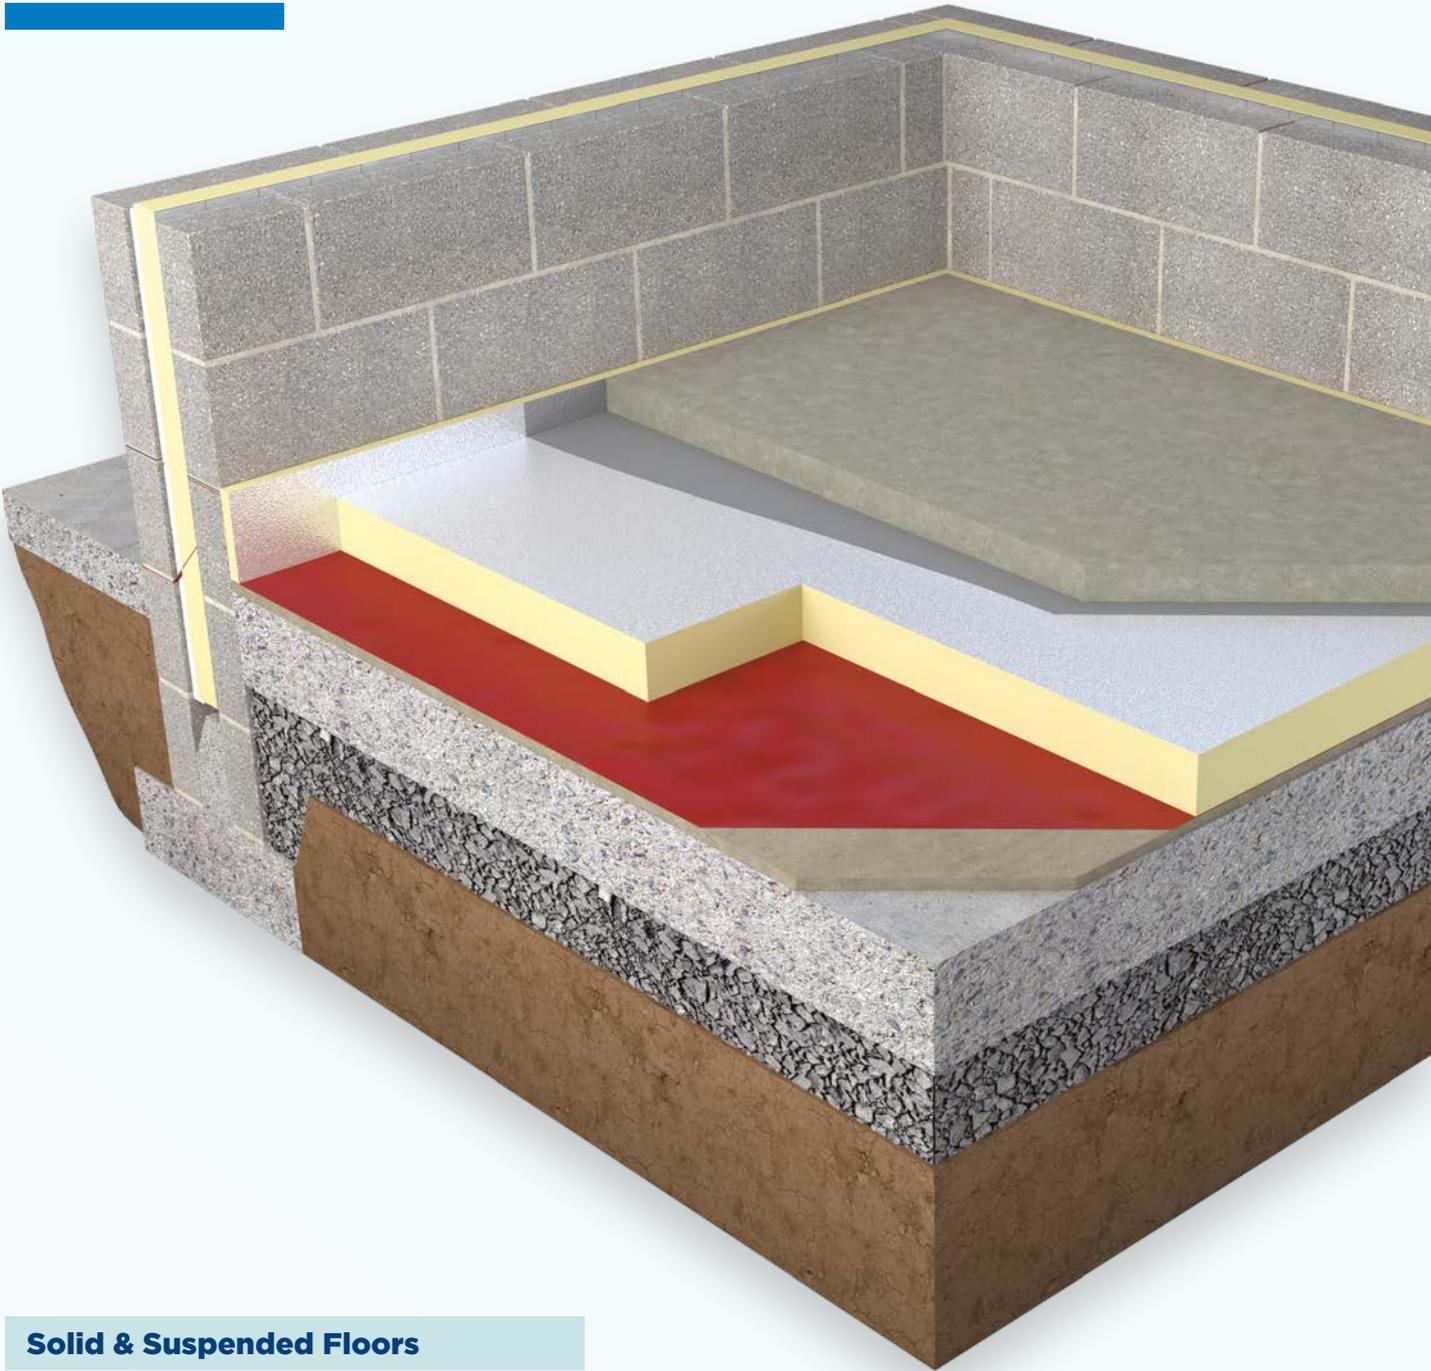

Solid & Suspended Floors

■ ECO/MA Solid & Suspended Floors	45
■ XO/UF Floors	46
■ XT/PR_UF Floors	47
■ XT/Walk-R	48

ECO360 BIO-ENHANCED PIR INSULATION

Solid & Suspended Floors

Lambda value as low as **0.020 W/mK**

ECO/MA

Bio-enhanced, PIR insulation suitable for solid and suspended floors. ECO360 MA for floors offers improved PIR insulation performance with a thermal conductivity of 0.020 W/mK.

This bio-enhanced insulation will significantly improve the U-Value of new and existing floors. It combines high compressive strength with low thermal conductivity, providing an effective solution for floor insulation.



Key Features

- Bio-enhanced PIR insulation
- Halogen free
- Enhanced performance as low as 0.020 W/mK
- Bio-degradable packaging
- High compressive strength
- Suitable for underfloor heating

Specifications

Thermal Conductivity	0.020 W/mK
Compressive Strength	CS (10\Y) 150
Facings	Textured foil facings
Core	Bio-enhanced PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	100, 125, 150mm
Board Profile	Square Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

XTROLINER SUPERIOR PERFORMANCE PIR INSULATION*

Solid & Suspended Floors

Lambda value as low as **0.021 W/mK**

XO/UF

XtroLiner Underfloor superior performance PIR offers improved insulation performance with a thermal conductivity of 0.021 W/mK. The floor in any building is an area of considerable downward heat loss when not properly insulated.

XtroLiner Underfloor will significantly improve the U-Value of new and existing floors. It combines high compressive strength with low thermal conductivity, providing an effective solution for floor insulation.



Key Features

- Verified EPD available
- Reaction to Fire (Euroclass) C-s2, d0
- High compressive strength
- Suitable for underfloor heating
- Perimeter strips for robust detailing
- Reduced insulation thickness
- Textured foil

Specifications

Thermal Conductivity	0.021 W/mK
Compressive Strength	CS (10\Y) 150
Facings	Textured foil facings
Core	Superior Performance PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	50, 60, 75, 80, 100, 120, 150mm
Board Profile	Square Edge

*The reference to superior performance relates to the product or ranges thermal conductivity or fire performance or a combination of both, when compared to our Thin-R range. Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

THIN-R PIR INSULATION

Ground Supported & Suspended Floors

XT/PR_UF (FLOORS)

The floor in any building is an area of considerable downward heat loss when not properly insulated. Thin-R Underfloor will significantly improve the U-Value of new and existing floors.

Thin-R Underfloor combines high compressive strength with low thermal conductivity, providing an effective solution for floor insulation.



Key Features

- Verified EPD available
- High compressive strength
- Suitable for underfloor heating
- Perimeter strips for robust detailing
- Reduced insulation thickness
- Composite foil facings

Specifications

Thermal Conductivity	0.022 W/mK
Compressive Strength	CS (10\Y) 140
Core	PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	25, 30, 40, 50, 60, 70, 90, 100, 110, 125, 140, 150mm
Board Profile	Square Edge


Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

THIN-R PIR INSULATION

Insulated Loft Decking

XT/WALK-R

Thin-R Loft Decking Walk-R is a composite of PIR insulation with tough OSB board that provides safe access into insulated roof spaces. Walk-R maintains very high insulation values and complies with health and safety guidelines.

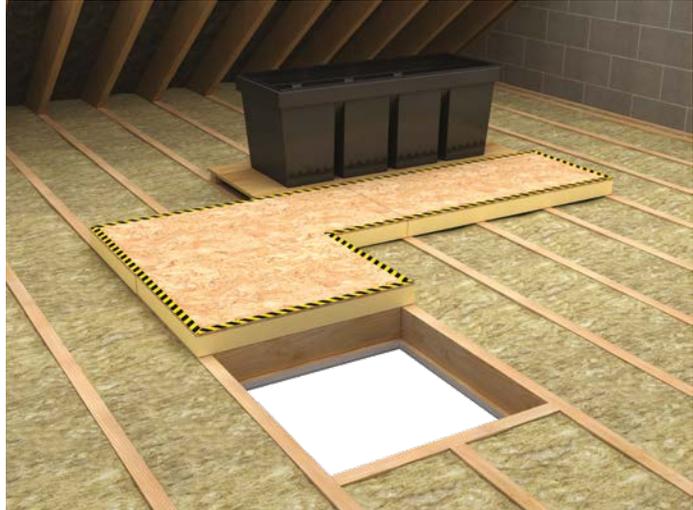

Key Features

Verified EPD is available for the product insulation

Safe access to attic space

High thermal performance

Complies with health and safety guidelines

Specifications

Thermal Conductivity	0.022 W/mK
Compressive Strength	CS (10\Y) 150
Facings	Composite foil facings/OSB Board
Core	PIR Insulation
Board Size	1200mm x 600mm
Board Thickness	86mm (75mm PIR + 11mm OSB Board)
Board Profile	Square Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

SOFFITS



■ SR/ST Soffit	50
■ SR/STP Soffit	51
■ XO/STP Soffit	52
■ SW/ST Soffit	53

SAFE-R PHENOLIC INSULATION

Soffit Application

Lambda value as low as **0.020 W/mK**

SR/ST

Safe-R Soffit provides effective thermal and fire performance solutions in structural ceiling applications in commercial and residential buildings. This high performance phenolic insulation board is faced with low emissivity foil facings.

Safe-R Soffit Board is supplied as a performance, rather than a decorative product. Refer to Safe-R Soffit Plus, a high performance laminate that offers low maintenance and security protection with a surface that will accept a decorative finish.



Key Features

- Verified EPD available
- Reaction to Fire (Euroclass) C-s1, d0
- Foil faced finish
- Reduced Thermal Bridging
- Lower Lambda value for improved U-Values

Specifications

Thermal Conductivity	0.020 - 0.021 W/mK
Facings	Composite foil facings
Core	Phenolic Insulation
Board Size	2400mm x 1200mm
Board Thickness	50, 60, 75, 80, 100, 120mm
Board Profile	Square Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

SAFE-R PHENOLIC INSULATION

Soffit Application

Lambda value as low as **0.020 W/mK**

SR/STP

Safe-R Soffit Plus provides effective thermal and fire performance solutions in structural ceiling applications in commercial and residential buildings.

The phenolic insulation board, with low emissivity aluminium foil facings, is adhesively bonded to a 6mm building panel which offers a secure finish for ease of maintenance to which a decorative finish may be applied.



Key Features

Verified EPD is available for the product insulation

Reaction to Fire (Euroclass) B-s1, d0

Impact resistant 6mm building panel

Accepts decorative finish

Reduced Thermal Bridging

Lower Lambda value for improved U-Values

Specifications

Thermal Conductivity	0.020 - 0.021 W/mK
Facings	Composite foil/6mm building panel
Core	Phenolic Insulation
Board Size	2400mm x 1200mm
Board Thickness	56, 66, 81, 86, 106, 126mm
Board Profile	Square Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

XTROLINER SUPERIOR PERFORMANCE PIR INSULATION*

Soffit Application

Lambda
value as low as
0.021 W/mK

XO/STP

XtroLiner Soffit Plus provides effective thermal and fire performance solutions in structural ceiling applications in commercial and residential buildings.

The high performance modified PIR insulation board, with low emissivity textured aluminium foil facings, is adhesively bonded to a 6mm building panel which offers a secure finish for ease of maintenance to which a decorative finish may be applied.



Key Features

Verified EPD is available for the product insulation

High impact resistant 6mm building panel

Reaction to Fire (Euroclass) B-s1, d0

Accepts a decorative finish

Reduced Thermal Bridging

Lower Lambda value for improved U-Values

Specifications

Thermal Conductivity	0.021 W/mK
Facings	Textured foil facings/6mm building panel
Core	Superior Performance PIR Insulation
Board Size	2400mm x 1200mm
Board Thickness	56, 66, 81, 86, 106, 126mm
Board Profile	Square Edge

*The reference to superior performance relates to the product or ranges thermal conductivity or fire performance or a combination of both, when compared to our Thin-R range.
Other thicknesses may be available subject to minimum order quantity and extended lead times.
Please contact your Area Sales Manager for further details

STONEWOOL NON-COMBUSTIBLE INSULATION

Soffit Application

SW/ST

Unilin’s range of non-combustible, Euroclass ‘A1’ Stonewool Insulation provides surety when the highest fire performance is required. Stonewool Soffit provides effective fire performance in structural ceiling applications in both residential and commercial buildings.

Our Stonewool Insulation provides a robust, uniform, high density insulation solution suitable for mechanically fixing to concrete substrates.



Key Features

Euroclass A1 Fire Classification

Robust high density

Improved acoustic performance

Specifications

Thermal Conductivity	0.036 W/mK
Board Size	1200mm x 600mm
Board Thickness	100, 125, 150mm
Board Profile	Square Edge

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

FOAMGLAS®

FOAMGLAS T3+

FOAMGLAS® insulation is manufactured from specially graded recycled glass** and natural raw materials which are available in abundant supply (sand, dolomite, lime...). The insulation is totally inorganic, contains no ozone depleting propellants, flame resistant additives or binders. Without VOC or other volatile substances.

Extensive Range of Applications:

- Floors
- Façades
- Retaining walls (Below ground level)
- Internal lining
- Soffits
- Flat roofs



Key Features

Non combustible

Impervious to water vapour

Waterproof

Dimensionally stable

Acid/Chemical resistant

Manufactured from specially graded recycled glass*

High Compressive Strength

Specifications

Thermal Conductivity	0.036 W/mK
Compressive strength	500 KPa
Core	Cellular Glass Insulation
Board Size	600x450mm/1200x600mm
Board Thickness	50-200mm
Board Profile	Square Edge

* Recycled glass consists of highly selected postconsumer glass and highly selected production scrap/co-products


Other thicknesses may be available subject to minimum order quantity and extended lead times.
Please contact your Area Sales Manager for further details

FOAMGLAS®

FOAMGLAS PERINSUL HL

The Passive Solution for thermal breaks including ground floor perimeter, EWI and thresholds.

Extensive Range of Applications:



EWI Plinth




Flat Roof Parapet



Eaves



Party Wall - Ceiling

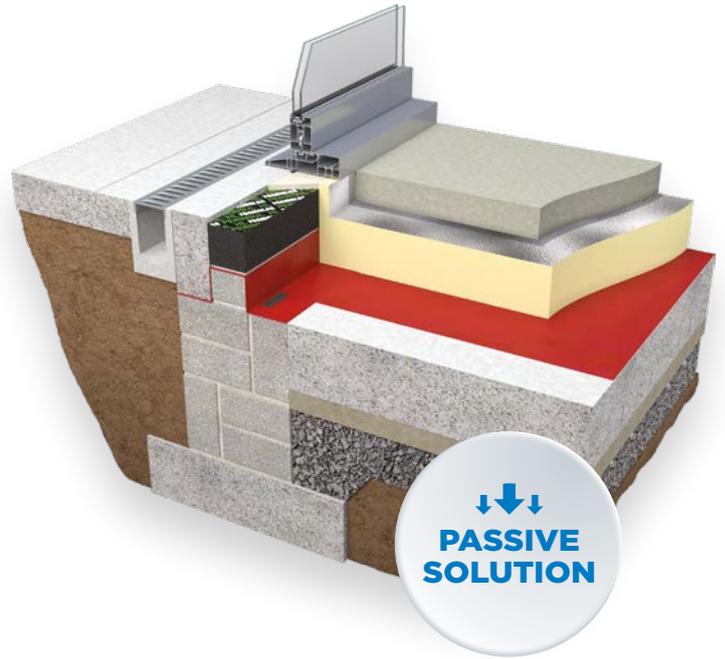

Key Features

Euroclass A1 Non-Combustible*

100% impermeable to moisture penetration

Achieve Passive Performance

Gas and radon impermeable

Suitable for all walls - Masonry, Steel & Timber Framed

Solves threshold bridging with lifetime performance

Made from 60% recycled glass

Specifications

Thermal Conductivity	0.058 W/mK
Core	Cellular Glass Insulation
Board Size	100x450mm/140x450mm/215x450mm
Board Thickness	100mm
Board Profile	Square Edge

*Refers to products core material

Other thicknesses may be available subject to minimum order quantity and extended lead times. Please contact your Area Sales Manager for further details

XPS

EXTRUDED POLYSTYRENE
INSULATION

XPS

XPS is a high performance rigid extruded polystyrene insulation board providing a durable thermal solution to technically demanding applications where high compressive loading is a requirement.

This product is ideally suited for use in commercial, industrial and cold storage areas where vehicular traffic and loading is an issue.



Key Features

Ideally suited for use in highly loaded and trafficked floors, basement walls and inverted roofs

Available as XPS 300 (300 kPa), XPS 500 (500 kPa) and XPS 700 (700 kPa)

Specifications


Thermal Conductivity	0.033 - 0.036 (W/mK)*
Board Size	1250 x 600mm
Board Thickness	30, 40, 50, 60, 80, 100, 120mm
Board Profile	Rebated Edge

XPS 300 available in 140mm and 160mm subject to quantity and lead time.
*Thermal conductivity is dependent on product thickness

EPS EXPANDED POLYSTYRENE INSULATION

EPS

The Unilin Hytherm & Warm-R Insulation boards consist of rigid polystyrene boards cut from moulded blocks of white EPS Hytherm or with grey graphite enhanced EPS Warm-R.

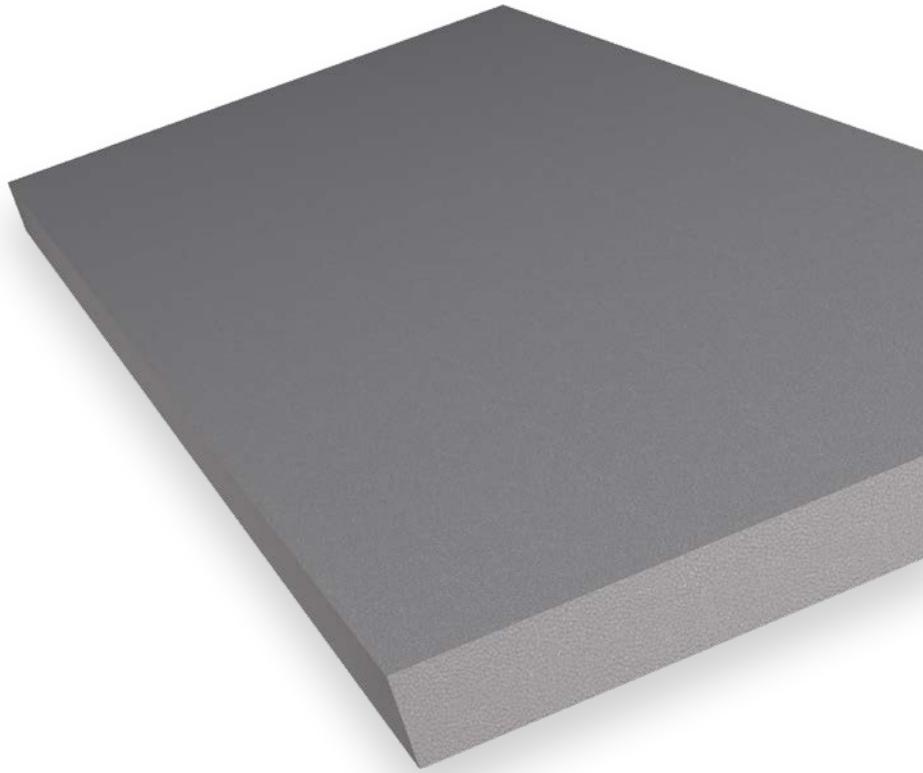

Key Features

Verified EPD available

Extensive range of thicknesses

Available in 70 kPa or 100 kPa

Verified EPDs available

Thermal Conductivity	0.031 W/mK	Warm-R SD E Grey Warm-R Premium HD E Grey Warm-R SD E Grey EWB
	0.035 W/mK	Hytherm HD White & Hytherm HD E White
	0.038 W/mK	Hytherm SD White
Core	Expanded Polystyrene	
Board Size	2400mm x 1200mm 1800mm x 1200mm	
Board Thickness	Various	
Board Profile	Straight Edge	

SAFE-R CAVITY CLOSERS

SAFE-R CLOSE-R

A high performance EN fire-rated cavity closer providing compliance with structural and thermal regulations in Ireland. Structural failures in cavity walls are largely due to the incorrect placement of wall ties within the cavity. Openings at windows and doors require additional wall ties to be placed at a maximum 225mm into the cavity at every course of block. It is also a requirement under TGD Part A that additional wall ties must be placed at gable end openings and either side of expansion joints.

These extra structural ties do interrupt the continuity of the insulation layer and increase Thermal Bridging issues at very vulnerable areas, with mould growth normally most evident at reveals.

Safe-R Close-R achieves an excellent fire rating and allows for the correct placement of wall ties to meet TGD Part A structural requirements. The superior insulation performance attains Passive & NZEB standards for Thermal Bridging.



Key Features

- Achieved in excess of 4 hour fire rating in a 150mm cavity when tested to EN1366-4
- Provides template for wall ties placement
- Ensures continuity of insulation
- Suitable for door, window, eaves and openings
- Suitable for use at expansion joints

Specifications

Facings	Plastic encapsulated stonewool
Core	Phenolic Insulation
Board Size	1200mm x 200mm
Suitable for Cavity Widths	100, 125, 150mm*
Board Profile	Square Edge


Other thicknesses may be available subject to minimum order quantity and extended lead times.
Please contact your Area Sales Manager for further details
*Please contact our Technical Team for further information

CLOSE-R INSULATED CAVITY CLOSER

CLOSE-R

Unilin Close-R fully insulated cavity closers are a solution for builders and specifiers for the closing of cavities around window and door openings, preventing cold bridging, damp penetration, air infiltration and condensation.

The Close-R range is used to close cavities and is suited to all types of windows and doors and is available in sizes to fit cavity widths from 100mm - 150mm, with checked detail to suit brick or drylined specifications and flanged detail to suit block outer facings. (Flanged detailing requires precise construction tolerances.)

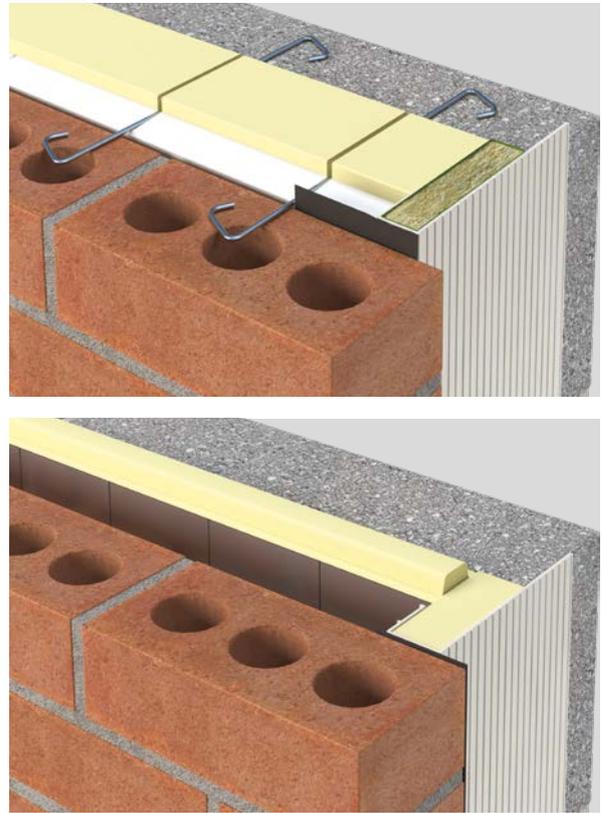

Key Features

Suits 100 - 150mm cavities

Meets new Part L requirements

Available from Builders Merchants

Specifications

For further assistance please contact the Unilin Technical team

Achieving NZEB Compliance for Typical New Dwellings

Detached: Scheme Development

EPC	CPC	RER
Target: 0.300	0.35	20%
Actual: 0.255	0.209	50%



Result: **A2** Rating

Floor U-Value	0.11	150mm XO/UF
Cavity U-Value	0.16	125mm CavityTherm
Ceiling U-Value	0.12	300mm fibre plus thermal lining
Windows U-Value	1.40	Double glazed
Door U-Value	1.00	Insulated door
Thermal Bridging Factor	0.03	Calculated details
Air Permeability	5	0.25 ACH
Natural Ventilation	Yes	
Heating System	392/217%	Heat Pump: Space/Water Efficiency
Heating Controls	Yes	Full Time & Temp Controls
Cylinder	200L	Factory Insulated 100mm
Secondary Heating	Yes	Log Burning Stove
Delay Start Stat	No	
Light Fittings	100%	Low Energy Lights
Renewable Technology	Yes	From Heat Pump

Semi-Detached: Scheme Development

EPC	CPC	RER
Target: 0.300	0.35	20%
Actual: 0.293	0.268	26%



Result: **A2** Rating

Floor U-Value	0.11	150mm XO/UF
Cavity U-Value	0.16	125mm CavityTherm
Ceiling U-Value	0.12	300mm fibre plus thermal lining
Windows U-Value	1.40	Double glazed
Door U-Value	1.00	Insulated door
Thermal Bridging Factor	0.04	Calculated details
Air Permeability	5	0.25 ACH
Natural Ventilation	Yes	
Heating System	91.2%	Gas Condensing Boiler
Heating Controls	Yes	Full Time & Temp Controls
Cylinder	200L	Factory Insulated 100mm
Secondary Heating	None	
Delay Start Stat	None	
Light Fittings	100%	Low Energy Lights
Renewable Technology	Yes	3 x 270w PV Panels (4.89m ²)

Apartment: Scheme Development (Mid Floor Apartment)

EPC	CPC	RER
Target: 0.300	0.35	20%
Actual: 0.294	0.286	39%



Result: A2 Rating

Floor U-Value	None	
Cavity U-Value	0.16	125mm CavityTherm
Ceiling U-Value	None	
Windows U-Value	1.40	Double Glazed
Door U-Value	1.00	Insulated Door
Thermal Bridging Factor	0.02 Calculated Details	
Air Permeability	5	0.25 ACH
Natural Ventilation	Yes	
Heating System	390/210%	Heat Pump: Space/Water Efficiency
Heating Controls	Yes	Full Time & Temp Controls
Cylinder	180L	Factory Insulated 100mm
Secondary Heating	None	
Delay Start Stat	None	
Light Fittings	100%	Low Energy Lights
Renewable Technology	Yes	From Heat Pump

Detached: Self Build

EPC	CPC	RER
Target: 0.300	0.35	20%
Actual: 0.280	0.226	45%



Result: A2 Rating

Floor U-Value	0.11	150mm XO/UF
Cavity U-Value	0.13	150mm CavityTherm
Ceiling U-Value	0.12	300mm Fibre Plus Thermal Lining
Windows U-Value	1.40	Double Glazed
Door U-Value	1.00	Insulated Door
Thermal Bridging Factor	0.02 Calculated Details	
Air Permeability	5	0.25 ACH
Natural Ventilation	Yes	
Heating System	268/233%	Heat Pump: Space/Water Efficiency
Heating Controls	Yes	Full Time & Temp Controls
Cylinder	300L	Factory Insulated 100mm
Secondary Heating	Yes	Log Burning Stove
Delay Start Stat	None	
Light Fittings	100%	Low Energy Lights

Handling, Cutting & Storage

Unilin insulation should be stored off the ground, on a clean, flat surface and must be stored under cover. The polythene wrapping is not considered adequate protection for outside exposure. Care should be taken to protect the insulation in storage and during the build process.

The insulation boards can be readily cut using a sharp knife or fine toothed saw. Ensure tight fitting of the insulation boards to achieve continuity of insulation as asked for within the ACDs. Appropriate PPE should be worn when handling insulation. Please refer to Health & Safety data sheets on our website.

The boards are wrapped in polythene packs and each pack is labelled with details of grade/type, size and number of pieces per pack.

Durability

Unilin Insulation products are stable, rot proof, provide no food value to vermin and will remain effective for the lifetime of the building, depending on specification and installation. Care should be taken to avoid contact with acids, petrol, alkalis and mineral oil. When contact is made, clean materials in a safe manner before installation.





Expect more Knowledge

With unrivalled knowledge and expertise, our technical team is on hand to advise you of the most suitable insulation solutions for your renovation project.

Talk to our technical experts.

Get in touch

T: 046 906 6050 E: tech.ui@unilin.com



unilininsulation.ie

Meet the team who can help with your project

Remote Support & Immediate Callback

We provide an immediate callback facility available when you need it. Our expanded Technical Help Desk provides unrivalled immediate support.

Every one of our technical team is trained to the highest industry standards of competency in U-Value calculation and condensation risk analysis with members assessed and certified under the BBA/TIMSA competency scheme.

We are the first company in Ireland to be assessed and certified under the NSAI thermal modelling competency scheme.

Our team and products are certified in Ireland and the UK through the following certifications bodies:

1. **BRE** Thermal bridging modelling competency certification
2. **NSAI** Thermal modelling competency scheme
3. **BBA-TIMSA** competency scheme for U-Value calculation and condensation risk analysis
4. **BBA and NSAI** certification of the Unilin Insulation insulation boards
5. **SAP and DEAP** energy assessment

Technical Team



Eamonn Clarke
Technical Manager



Mark Magennis
Technical Services Manager



Marc Walsh
Product Management & Development Engineer



Paschal Gallagher
Technical Advisor



Conor Sheppard
Technical Advisor



Fiona Prendergast
Technical Advisor



Ian Geraghty
Technical Advisor

Talk to the Technical Team

t. 046 906 6050 e. tech.ui@unilin.com

Our Dedicated Sales Team

Sales Team



Ardil Jennings
West

t. 087 254 1709



Bernard Morris
North Midlands,
Border & West

t. 086 825 1209



Noel O'Donoghue
South East

t. 087 289 8680



Ciaran Flanagan
Midlands

t. 087 185 1677



Wayne Murphy
National Sales
Manager

t. 087 966 6955



Niall Spillane
Dublin

t. 087 854 9259



Peter Cowley
South West

t. 087 425 0234



Michael Bryson
North

t. +44 7787 556 700

Specification Team



Phil Ward
Specification Manager
Dublin

t. 087 997 8246



Raymond Madden
Specification Manager
South

t. 087 219 5850



Francis Rilley
Specification Manager
North

t. 087 998 1999



HIGH

**THERMAL
PERFORMANCE**

LOW

**EMBODIED
CARBON**

Search for ECO360 on:
unilininsulation.ie

 **UNILIN**
INSULATION

ECO360

BIO-ENHANCED PIR INSULATION

**AVAILABLE FOR WALLS,
FLOORS & ROOFS**

The ECO360 strategy is a commitment by Unilin Insulation to continually review and improve the sustainable credentials of our product offering and services, to reduce the environmental impact of the projects we work on in terms of operational energy and embodied carbon.

- ✓ Bio-enhanced formulation
- ✓ Part of a design solution to meet 2030 Climate Challenge targets
- ✓ Halogen free formulation
- ✓ Improved thermal performance as low as 0.020 W/mK
- ✓ Bio-degradable packaging materials
- ✓ Verified EPD available





Unilin Insulation (IRL)

Liscarton Industrial Estate
Kells Road, Navan
Co. Meath, Ireland
C15 NP79

t. +353 (0) 46 906 6000

e. info.ui@unilin.com

unilininsulation.ie

